

Your Expert Partner for Human Machine Interfaces

Single-LED

10-2603.3178S






https://www.eao.com/p/10-2603.3178S

Your product:



10-2603.3178S Single-LED

| OPERATING-/INDICATION PART | |
|-----------------------------------|---|
| Illumination colour: | White |
| | |
| ELECTRICAL CHARACTERISTICS | |
| Operating voltage: | 2 - 6 V DC |
| Lumi. Intensity: | 500 mcd |
| | |
| MECHANICAL CHARACTERISTICS | |
| Weight: | 0.001 kg |
| | |
| CERTIFICATE | |
| REACH: | REACH compliant |
| RoHS: | RoHS compliant |
| | |
| OTHER | |
| Short Description: | Single-LED, T1 Bi-Pin, White, 2 - 6 V DC |
| Kind of illlumination: | Single-LED |
| Hints: | The customer has to decide what series resistor shall be used to the LED Luminosity and wave length variations caused by LED manufacturing processes may cause slight differences regarding the illumination. The customer has to decide what resistor shall be used to the LED |
| Wiring diagrams: | |

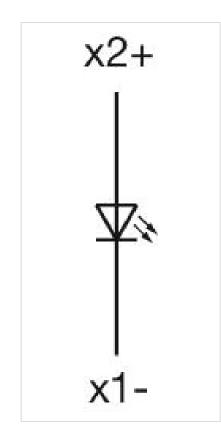

Component layouts:

