

# Indicator

17-  
401230Z



<https://www.eao.com/p/17-401230Z>

Your product:

---



## 17-401230Z Indicator

### FRONT

<b>Front dimension:</b>	Ø 18,3 mm
<b>Front form:</b>	Round
<b>Reflector:</b>	Plastic, Black

### MOUNTING

<b>Design:</b>	Raised
<b>Mounting cut-out:</b>	Ø 16.2 mm
<b>Mounting type:</b>	Panel mounting

### OPERATING-/INDICATION PART

<b>Lens:</b>	round
<b>Illumination colour:</b>	Red

### ELECTRICAL CHARACTERISTICS

<b>Operating voltage:</b>	230 V AC ±10 %
<b>Operation current:</b>	3 mA ±15 %
<b>Switching rating:</b>	
<b>Lumi. Intensity:</b>	240 mcd
<b>Polarity:</b>	Anode (+) Brass plug-in connector Cathode (-) Brass tinned plug-in connector

### MECHANICAL CHARACTERISTIC

<b>Terminal:</b>	Plug-in terminal, 2.8 x 0.8 mm
------------------	--------------------------------

**Tightening torque:** Fixing nut max. 0.2 Nm  
**Weight:** 0.008 kg

### **AMBIENT CONDITION**


**IP Protection:** IP40 front side, IP65 front side, according to IEC 60529  
**Operating temperature:** – 20 °C ... + 60 °C  
**Storage temperature:** – 25 °C ... + 80 °C

### **CERTIFICATE**


**Approbations:** UL  
**Conformities:** 2011 / 65 / EC (RoHS), 2014 / 35 / EU (230 VAC)  
**REACH:** REACH compliant  
**RoHS:** RoHS compliant

### **OTHER**


**Short Description:** Indicator, Ø 16.2 mm, Ø 18,3 mm, Round, Plug-in terminal, 2.8 x 0.8 mm, Red  
**Kind of illumination:** Single-LED  
**Product attributes:** With terminals protection tube  
**Hints:** Connectors: Brass terminal = anode (+); brass tinned terminal = cathode (-), IP67 front side gap between LED and reflector and gap between reflector and frontplate sealed to IP67 when using the supplied gasket., The plastic is limited resistant to chemicals.  
**Wiring diagrams:**

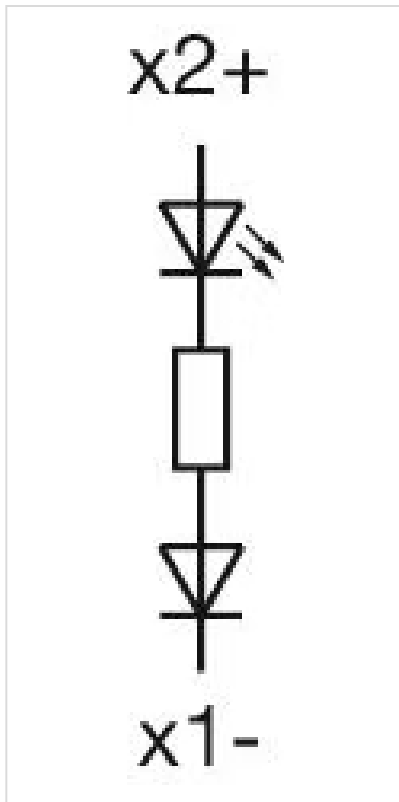

**Mounting cut-outs:**

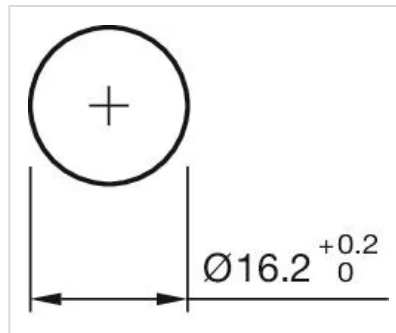

**Dimension drawings:**

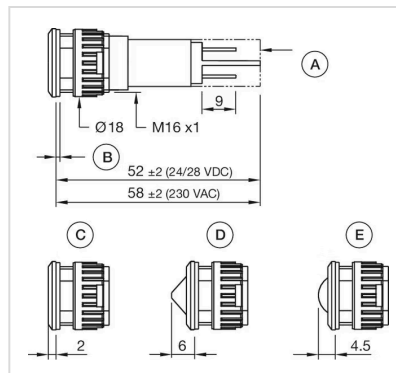

- A = Protection tube (only 230 VAC)
- B = 1 gasket
- C = flat
- conical
- D = round