

# Actuator

18-  
062.0054L



<https://eao.com/p/18-062.0054L>

Your product:

---



## 18-062.0054L Actuator

### FRONT

<b>Front dimension:</b>	Ø 19 mm
<b>Front form:</b>	round
<b>Front bezel colour:</b>	Black
<b>Front bezel material:</b>	Plastic

### MOUNTING

<b>Design:</b>	flush
<b>Mounting type:</b>	Panel mounting

### OPERATING-/INDICATION PART

<b>Lens colour:</b>	Yellow
<b>Lens material:</b>	Plastic
<b>Lens illumination:</b>	illuminative
<b>Lens shape:</b>	flush
<b>Lens optics:</b>	translucent
<b>Illumination colour:</b>	Yellow

### ELECTRICAL CHARACTERISTICS

<b>Operating voltage:</b>	24 V DC ±10 %
---------------------------	---------------

### MECHANICAL CHARACTERISTIC

<b>Terminal:</b>	Soldering terminal
------------------	--------------------

**Weight:** 0.003 kg

### AMBIENT CONDITION

**Operating temperature:** - 25 °C ... + 65 °C

### CERTIFICATE

**REACH:** REACH compliant

**RoHS:** RoHS compliant


### OTHER

**Short Description:** Actuator, Ø 19 mm, flush, illuminative, Yellow, Plastic, translucent, round, Black, Plastic, Soldering terminal, Yellow


**Dimension:** Ø 13.8 mm

**Product attributes:** Luminosity and wave length variations caused by LED manufacturing processes may cause slight differences regarding the illumination. The customer has to decide what resistor shall be used to the LED

### Wiring diagrams:

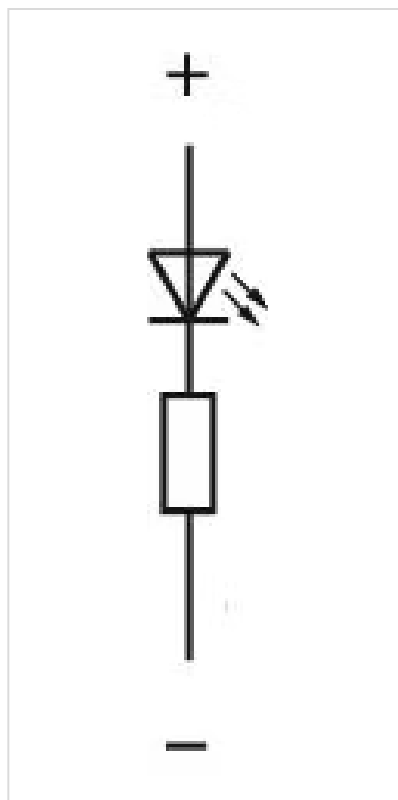


### Component layouts:

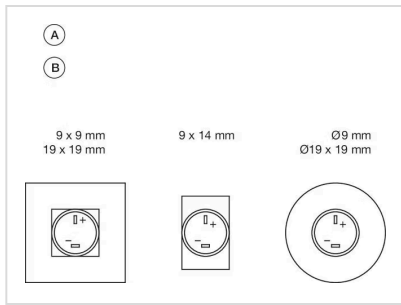

A = Terminals (rear side)  
 B = Indicator

**Mounting cut-outs:**

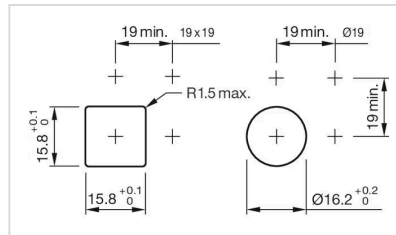

**Dimension drawings:**

