

# Actuator

18-  
082.0055L



<https://www.eao.com/component/18-082.0055L/en...>

Your product:

---



## 18-082.0055L Actuator

### PRODUCT RANGE

**Product Status:** Phase-out

### FRONT

**Front dimension:** 19 mm x 19 mm

**Front form:** Square

**Front bezel colour:** Black

**Front bezel material:** Plastic

### MOUNTING

**Design:** Flush

**Mounting type:** Panel mounting

### OPERATING-/INDICATION PART

**Lens colour:** Green

**Lens material:** Plastic

**Lens illumination:** Illuminated

**Lens shape:** Flush

**Lens optics:** translucent

**Illumination colour:** Green

### ELECTRICAL CHARACTERISTICS

**Operating voltage:** 24 V DC  $\pm 10$  %

## MECHANICAL CHARACTERISTICS

**Terminal:** Soldering terminal  
**Weight:** 0.003 kg

## AMBIENT CONDITION

**Operating temperature:** - 25 °C ... + 65 °C

## CERTIFICATE

**REACH:** REACH compliant  
**RoHS:** RoHS compliant


## OTHER

**Short Description:** Actuator, 19 mm x 19 mm, Flush, Illuminated, Green, Plastic, translucent, Square, Black, Plastic, Soldering terminal, Green


**Dimension:** 13.8 mm x 13.8 mm

**Product attributes:** Luminosity and wave length variations caused by LED manufacturing processes may cause slight differences regarding the illumination. The customer has to decide what resistor shall be used to the LED

**Wiring diagrams:**

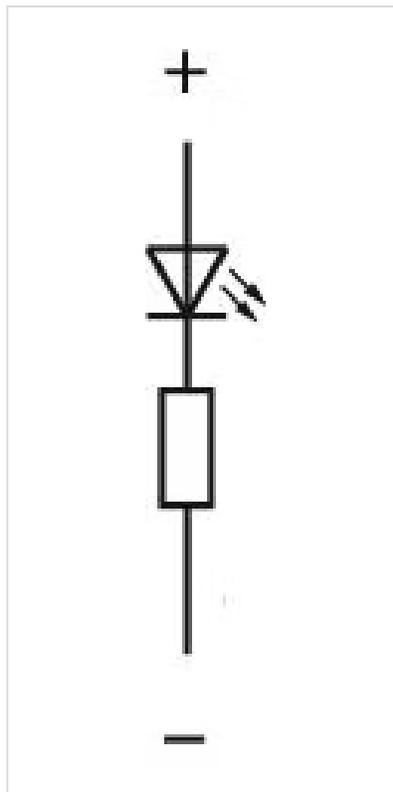


**Component layouts:**

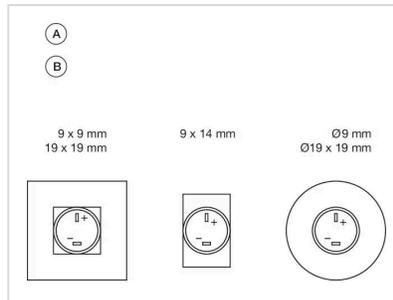

A = Terminals (rear side)  
B = Indicator

**Mounting cut-outs:**

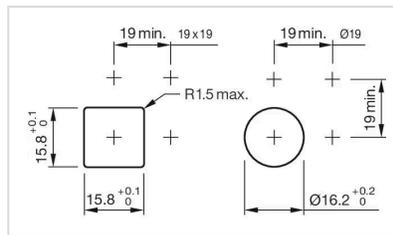

**Dimension drawings:**

