

# Actuator

18-082.0055L





# Your product:



# 18-082.0055L Actuator

PRO		

**Product Status:** Phase-out

**FRONT** 

Front dimension: 19 mm x 19 mm

Front form: Square

Front bezel colour: Black

Front bezel material: Plastic

## **MOUNTING**

Design: Flush

Mounting type: Panel mounting

## **OPERATING-/INDICATION PART**

Lens colour: Green

Lens material: Plastic

Lens illumination: Illuminated

Lens shape: Flush

Lens optics: translucent

Illumination colour: Green

## **ELECTRICAL CHARACTERISTICS**

Operating voltage: 24 V DC  $\pm 10\%$ 

### **MECHANICAL CHARACTERISTICS**

**Terminal:** Soldering terminal

**Weight:** 0.003 kg

#### **AMBIENT CONDITION**

**Operating temperature:**  $-25 \, ^{\circ}\text{C} \, ... \, + 65 \, ^{\circ}\text{C}$ 

#### **CERTIFICATE**

**REACH:** REACH compliant

RoHS: RoHS compliant

### **OTHER**

Short Description: Actuator, 19 mm x 19 mm, Flush, Illuminated, Green, Plastic, translucent, Square,

Black, Plastic, Soldering terminal, Green


**Dimension:** 13.8 mm x 13.8 mm

Product attributes: Luminosity and wave length variations caused by LED manufacturing processes


may cause slight differences regarding the illumination. The customer has to

decide what resistor shall be used to the LED

Wiring diagrams:

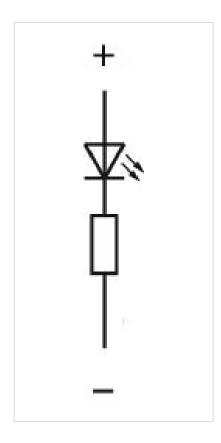


## Component layouts:



A = Terminals (rear side) B = Indicator

# Mounting cut-outs:



## Dimension drawings:

