

# Actuator

45-  
2530.1910.000



<https://www.eao.com/p/45-2530.1910.000>

Your product:

---



## 45-2530.1910.000

### Actuator

#### FRONT

Front dimension:	Ø 40 mm
Front form:	Round
Front bezel colour:	Black
Front bezel material:	Plastic

#### MOUNTING

Design:	Raised
Mounting cut-out:	Ø 22.3 mm
Mounting type:	Panel mounting

#### OPERATING-/INDICATION PART

Lens colour:	Black
Lens material:	Plastic
Lens illumination:	Non illuminated
Lens shape:	Mushroom-head
Lens optics:	opaque

#### ELECTRICAL CHARACTERISTICS

Switching rating:

#### MECHANICAL CHARACTERISTIC

Switching action: Maintained

<b>Switching system:</b>	Slow-make switching element
<b>Release type:</b>	Pull unlock
<b>Mechanical lifetime:</b>	500 000 cycles of operation
<b>Operating frequency:</b>	Max. 1 800/h
<b>Weight:</b>	0.028 kg

## AMBIENT CONDITION


<b>IP front protection:</b>	IP66, IP67, IP69K
<b>Operating temperature:</b>	– 25 °C ... + 70 °C
<b>Storage temperature:</b>	– 40 °C ... + 80 °C
<b>Shock resistance:</b>	According to IEC 60068-2-27: Sinusoidal half-wave 50 g / 11 ms
<b>Vibration resistance:</b>	According to IEC 60068-2-6: 20 ... 500 Hz: 5 g
<b>Climate resistance:</b>	During operation according to IEC 60721: 3K6, 3C3, 3S2, 3M6

## CERTIFICATE

<b>REACH:</b>	REACH compliant
<b>RoHS:</b>	RoHS compliant

## OTHER

<b>Short Description:</b>	Actuator, Ø 22.3 mm, Ø 40 mm, Mushroom-head, Non illuminated, Black, Plastic, opaque, Round, Black, Plastic, Maintained, IP66, IP67, IP69K, Pull unlock
<b>Housing colour:</b>	Black
<b>Housing material:</b>	Plastic
<b>Wiring diagrams:</b>	

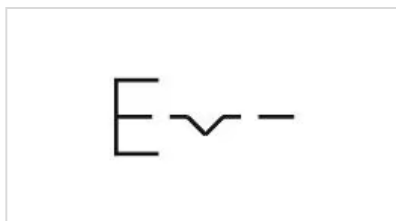

<b>Mounting cut-outs:</b>	
---------------------------	--



Dimension drawings:

