

Actuator

45-

2531.2A10.000



[https://www.eao.com/component/45-
2531.2A10.00...](https://www.eao.com/component/45-2531.2A10.00...)

Your product:



45-2531.2A10.000 Actuator

FRONT

Front dimension: Ø 60 mm

Front form: Round

Front bezel colour: Silver

Front bezel material: Metal

MOUNTING

Design: Raised

Mounting cut-out: Ø 22.3 mm

Mounting type: Panel mounting

OPERATING-/INDICATION PART

Lens colour: Black

Lens material: Plastic

Lens illumination: Non illuminated

Lens shape: Mushroom-head

Lens optics: opaque

MECHANICAL CHARACTERISTICS

Switching action: Momentary

Switching system: Slow-make switching element

Mechanical lifetime: 10 Mil. cycles of operation

Operating frequency: Max. 3 600/h

Weight: 0.053 kg

AMBIENT CONDITION

IP front protection: IP66, IP67, IP69K

Operating temperature: – 25 °C ... + 70 °C

Storage temperature: – 40 °C ... + 80 °C

Shock resistance: According to IEC 60068-2-27: Sinusoidal half-wave 50 g / 11 ms

Vibration resistance: According to IEC 60068-2-6: 20 ... 500 Hz: 5 g

Climate resistance: During operation according to IEC 60721: 3K6, 3C3, 3S2, 3M6

CERTIFICATE

REACH: REACH compliant

RoHS: RoHS compliant


OTHER

Short Description: Actuator, Ø 22.3 mm, Ø 60 mm, Mushroom-head, Non illuminated, Black, Plastic, opaque, Round, Silver, Metal, Momentary, IP66, IP67, IP69K


Housing colour: Silver

Housing material: Metal

Wiring diagrams:

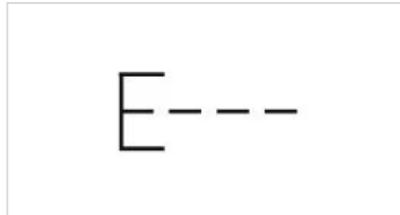

Mounting cut-outs:

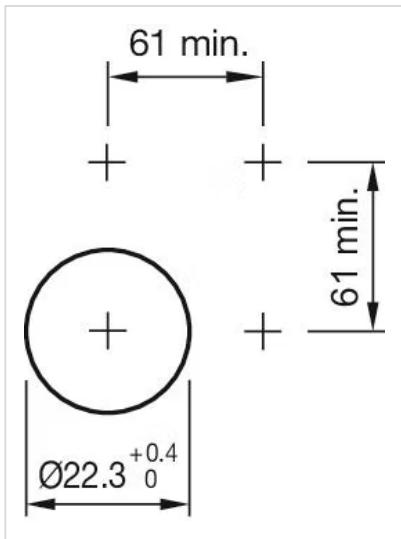

Dimension drawings:

