

# Actuator

45-  
2532.2920.000



<https://eao.com/p/45-2532.2920.000>

Your product:

---



## 45-2532.2920.000 Actuator

### FRONT

|                              |         |
|------------------------------|---------|
| <b>Front dimension:</b>      | Ø 40 mm |
| <b>Front form:</b>           | round   |
| <b>Front bezel colour:</b>   | Silver  |
| <b>Front bezel material:</b> | Metal   |

### MOUNTING

|                          |                |
|--------------------------|----------------|
| <b>Design:</b>           | raised         |
| <b>Mounting cut-out:</b> | Ø 22.3 mm      |
| <b>Mounting type:</b>    | Panel mounting |

### OPERATING-/INDICATION PART

|                           |                  |
|---------------------------|------------------|
| <b>Lens colour:</b>       | Red              |
| <b>Lens material:</b>     | Plastic          |
| <b>Lens illumination:</b> | non illuminative |
| <b>Lens shape:</b>        | mushroom-head    |
| <b>Lens optics:</b>       | opaque           |

### MECHANICAL CHARACTERISTIC

|                             |                             |
|-----------------------------|-----------------------------|
| <b>Switching action:</b>    | Momentary / maintained      |
| <b>Switching system:</b>    | Slow-make switching element |
| <b>Mechanical lifetime:</b> | 500 000 cycles of operation |
| <b>Operating frequency:</b> | Max. 1 800/h                |

**Weight:** 0.062 kg

### AMBIENT CONDITION

**IP front protection:** IP66, IP67, IP69K

**Operating temperature:** – 25 °C ... + 70 °C

**Storage temperature:** – 40 °C ... + 80 °C

**Shock resistance:** According to IEC 60068-2-27: Sinusoidal half-wave 50 g / 11 ms

**Vibration resistance:** According to IEC 60068-2-6: 20 ... 500 Hz: 5 g

**Climate resistance:** During operation according to IEC 60721: 3K6, 3C3, 3S2, 3M6

### CERTIFICATE

**REACH:** REACH compliant

**RoHS:** RoHS compliant


### OTHER

**Short Description:** Actuator, Ø 22.3 mm, Ø 40 mm, mushroom-head, non illuminative, Red, Plastic, opaque, round, Silver, Metal, Momentary / maintained, IP66, IP67, IP69K


**Housing colour:** Silver

**Housing material:** Metal

**Wiring diagrams:**



**Mounting cut-outs:**

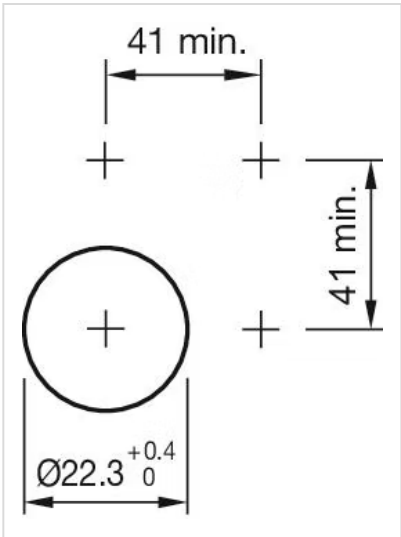

Dimension drawings:

