

# Actuator

45-  
2630.2AE0.000



<https://www.eao.com/p/45-2630.2AE0.000>

Your product:

---



## 45-2630.2AE0.000 Actuator

### FRONT

|                              |         |
|------------------------------|---------|
| <b>Front dimension:</b>      | Ø 60 mm |
| <b>Front form:</b>           | Round   |
| <b>Front bezel colour:</b>   | Silver  |
| <b>Front bezel material:</b> | Metal   |

### MOUNTING

|                          |                |
|--------------------------|----------------|
| <b>Design:</b>           | Raised         |
| <b>Mounting cut-out:</b> | Ø 22.3 mm      |
| <b>Mounting type:</b>    | Panel mounting |

### OPERATING-/INDICATION PART

|                           |               |
|---------------------------|---------------|
| <b>Lens colour:</b>       | Red           |
| <b>Lens material:</b>     | Plastic       |
| <b>Lens illumination:</b> | Illuminated   |
| <b>Lens shape:</b>        | Mushroom-head |
| <b>Lens optics:</b>       | transparent   |

### ELECTRICAL CHARACTERISTICS

**Switching rating:**

### MECHANICAL CHARACTERISTIC

**Switching action:** Maintained

|                             |                             |
|-----------------------------|-----------------------------|
| <b>Switching system:</b>    | Slow-make switching element |
| <b>Release type:</b>        | Pull unlock                 |
| <b>Mechanical lifetime:</b> | 500 000 cycles of operation |
| <b>Operating frequency:</b> | Max. 1 800/h                |
| <b>Weight:</b>              | 0.067 kg                    |

#### **AMBIENT CONDITION**


|                               |  |
|-------------------------------|--|
| <b>IP front protection:</b>   | IP66, IP67, IP69K  |
| <b>Operating temperature:</b> | - 25 °C ... + 70 °C  |
| <b>Storage temperature:</b>   | - 40 °C ... + 80 °C  |
| <b>Shock resistance:</b>      | According to IEC 60068-2-27: Sinusoidal half-wave 50 g / 11 ms |
| <b>Vibration resistance:</b>  | According to IEC 60068-2-6: 20 ... 500 Hz: 5 g                 |
| <b>Climate resistance:</b>    | During operation according to IEC 60721: 3K6, 3C3, 3S2, 3M6    |

#### **CERTIFICATE**


|               |                 |
|---------------|-----------------|
| <b>REACH:</b> | REACH compliant |
| <b>RoHS:</b>  | RoHS compliant  |

#### **OTHER**

|                           |   |
|---------------------------|---|
| <b>Short Description:</b> | Actuator, Ø 22.3 mm, Ø 60 mm, Mushroom-head, Illuminated, Red, Plastic, transparent, Round, Silver, Metal, Maintained, IP66, IP67, IP69K, Pull unlock |
| <b>Housing colour:</b>    | Silver  |
| <b>Housing material:</b>  | Metal   |
| <b>Wiring diagrams:</b>   |   |

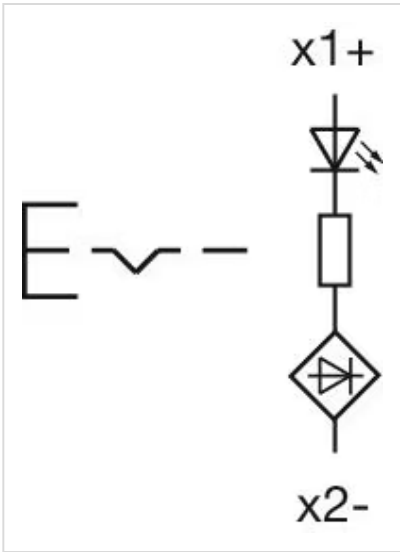

Mounting cut-outs:

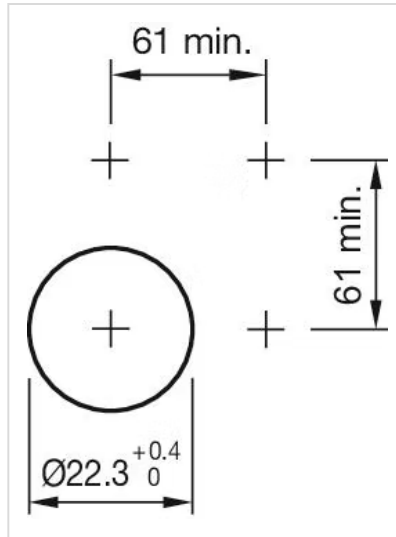

Dimension drawings:

