

Actuator

45-
2631.2AG0.000



[https://www.eao.com/component/45-
2631.2AG0.00...](https://www.eao.com/component/45-2631.2AG0.00...)

Your product:



45-2631.2AG0.000
Actuator

FRONT

Front dimension: Ø 60 mm

Front form: Round

Front bezel colour: Silver

Front bezel material: Metal

MOUNTING

Design: Raised

Mounting cut-out: Ø 22.3 mm

Mounting type: Panel mounting

OPERATING-/INDICATION PART

Lens colour: Yellow

Lens material: Plastic

Lens illumination: Illuminated

Lens shape: Mushroom-head

Lens optics: transparent

MECHANICAL CHARACTERISTICS

Switching action: Momentary

Switching system: Slow-make switching element

Mechanical lifetime: 10 Mil. cycles of operation

Operating frequency: Max. 3 600/h

Weight: 0.055 kg


AMBIENT CONDITION

| | |
|-------------------------------|--|
| IP front protection: | IP66, IP67, IP69K |
| Operating temperature: | - 25 °C ... + 70 °C |
| Storage temperature: | - 40 °C ... + 80 °C |
| Shock resistance: | According to IEC 60068-2-27: Sinusoidal half-wave 50 g / 11 ms |
| Vibration resistance: | According to IEC 60068-2-6: 20 ... 500 Hz: 5 g |
| Climate resistance: | During operation according to IEC 60721: 3K6, 3C3, 3S2, 3M6 |


CERTIFICATE

| | |
|---------------|-----------------|
| REACH: | REACH compliant |
| RoHS: | RoHS compliant |

OTHER
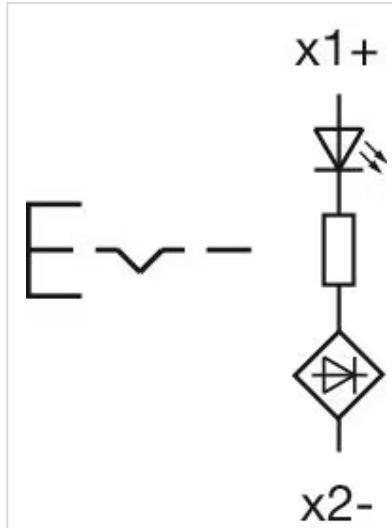
| | |
|---------------------------|--|
| Short Description: | Actuator, Ø 22.3 mm, Ø 60 mm, Mushroom-head, Illuminated, Yellow, Plastic, transparent, Round, Silver, Metal, Momentary, IP66, IP67, IP69K |
| Housing colour: | Silver |
| Housing material: | Metal |
| Wiring diagrams: |  |

Mounting cut-outs:

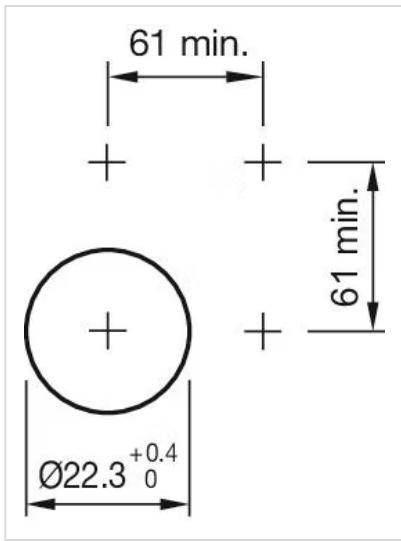

Dimension drawings:

