

# Actuator

45-  
2736.1960.000



<https://www.eao.com/p/45-2736.1960.000>

Your product:

---



## 45-2736.1960.000 Actuator

### FRONT

Front dimension:	Ø 40 mm
Front form:	Round
Front bezel colour:	Black
Front bezel material:	Plastic

### MOUNTING

Design:	Raised
Mounting cut-out:	Ø 22.3 mm
Mounting type:	Panel mounting

### OPERATING-/INDICATION PART

Lens colour:	Blue
Lens material:	Plastic
Lens illumination:	Non illuminated
Lens shape:	Mushroom-head
Lens optics:	opaque

### MECHANICAL CHARACTERISTICS

Switching action:	Maintained
Release type:	Twist to unlock
Mechanical lifetime:	300 000 cycles of operation
Operating frequency:	Max. 600/h

**Weight:** 0.046 kg

## AMBIENT CONDITION

**IP front protection:** IP66, IP67, IP69K

**Operating temperature:** – 25 °C ... + 70 °C

**Storage temperature:** – 40 °C ... + 80 °C

**Shock resistance:** According to IEC 60068-2-27: Sinusoidal half-wave 50 g / 11 ms

**Vibration resistance:** According to IEC 60068-2-6: 20 ... 500 Hz: 5 g

**Climate resistance:** During operation according to IEC 60721: 3K6, 3C3, 3S2, 3M6

## CERTIFICATE

**REACH:** REACH compliant

**RoHS:** RoHS compliant

**Standards:** IEC EN 60204-1

## OTHER

**Short Description:** Actuator, Ø 22.3 mm, Ø 40 mm, Mushroom-head, Non illuminated, Blue, Plastic, opaque, Round, Black, Plastic, Maintained, IP66, IP67, IP69K, Twist to unlock


**Dimension:** Ø 40 mm

**Housing material:** Plastic

**Product attributes:** Twist to unlock clockwise

**Hints:** Application as per DIN EN ISO 13850 and EN 60204-1

**Wiring diagrams:**

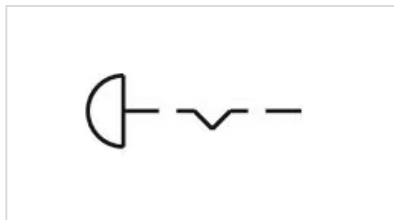

**Mounting cut-outs:**



Dimension drawings:

