

# Actuator

45-  
280S.4D90.003



<https://www.eao.com/p/45-280S.4D90.003>

Your product:

---



## 45-280S.4D90.003 Actuator

### FRONT

**Front dimension:** Ø 38 mm

**Front form:** Round

**Front bezel colour:** Sand grey

**Front bezel material:** Metal

### MOUNTING

**Design:** Flush

**Mounting cut-out:** Ø 30.5 mm

**Mounting type:** Panel mounting

### OPERATING-/INDICATION PART

**Lever colour:** White

**Lever material:** plastic

**Lever shape:** long

### MECHANICAL CHARACTERISTICS

**Switching action:** Momentary - Rest - Momentary

**Switching positions:** 3 positions

**Switching angle:** 45° left / 45° right

**Mechanical lifetime:** 1 Mil. cycles of operation

**Operating frequency:** 1 800/h

**Weight:** 0.084 kg

## AMBIENT CONDITION


<b>IP front protection:</b>	IP66, IP67, IP69K
<b>Operating temperature:</b>	– 25 °C ... + 70 °C
<b>Storage temperature:</b>	– 40 °C ... + 80 °C
<b>Shock resistance:</b>	According to IEC 60068-2-27: Sinusoidal half-wave 50 g / 11 ms
<b>Vibration resistance:</b>	According to IEC 60068-2-6: 10 ... 500 Hz: 5 g
<b>Climate resistance:</b>	During operation according to IEC 60721: 3K6, 3C3, 3S2, 3M6

## CERTIFICATE


<b>REACH:</b>	REACH compliant
<b>RoHS:</b>	RoHS compliant

## OTHER

<b>Short Description:</b>	Actuator, Ø 30.5 mm, Ø 38 mm, optional illuminative, White, long, Round, Sand grey, Metal, Momentary - Rest - Momentary, IP66, IP67, IP69K
<b>Housing material:</b>	Metal
<b>Hints:</b>	Front panel thickness 1 ... 6 mm
<b>Switching positions:</b>	

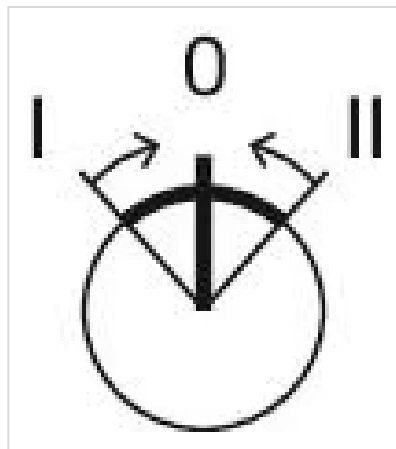

## Wiring diagrams:

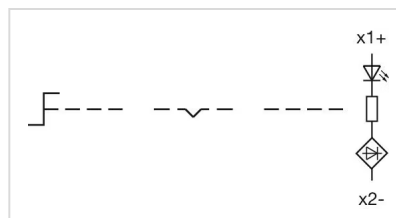

## Dimension drawings:

