

## Actuator

45-  
2819.4C90.003



[https://www.eao.com/component/45-  
2819.4C90.00...](https://www.eao.com/component/45-2819.4C90.00...)

Your product:

---



45-2819.4C90.003  
Actuator

#### FRONT

<b>Front dimension:</b>	Ø 38 mm
<b>Front form:</b>	Round
<b>Front bezel colour:</b>	Sand grey
<b>Front bezel material:</b>	Metal

#### MOUNTING

<b>Design:</b>	Flush
<b>Mounting cut-out:</b>	Ø 30.5 mm
<b>Mounting type:</b>	Panel mounting

#### OPERATING-/INDICATION PART

<b>Lever colour:</b>	White
<b>Lever material:</b>	plastic
<b>Lever shape:</b>	short

#### MECHANICAL CHARACTERISTICS

<b>Switching action:</b>	Maintained - Rest - Maintained
<b>Switching positions:</b>	3 positions
<b>Switching angle:</b>	45° left / 45° right
<b>Mechanical lifetime:</b>	1 Mil. cycles of operation (RCC/RPB)
<b>Operating frequency:</b>	1 800/h
<b>Weight:</b>	0.08 kg


## AMBIENT CONDITION

<b>IP front protection:</b>	IP66, IP67, IP69K
<b>Operating temperature:</b>	– 25 °C ... + 70 °C
<b>Storage temperature:</b>	– 40 °C ... + 80 °C
<b>Shock resistance:</b>	According to IEC 60068-2-27: Sinusoidal half-wave 50 g / 11 ms
<b>Vibration resistance:</b>	According to IEC 60068-2-6: 10 ... 500 Hz: 5 g
<b>Climate resistance:</b>	During operation according to IEC 60721: 3K6, 3C3, 3S2, 3M6


## CERTIFICATE

<b>REACH:</b>	REACH compliant
<b>RoHS:</b>	RoHS compliant

## OTHER
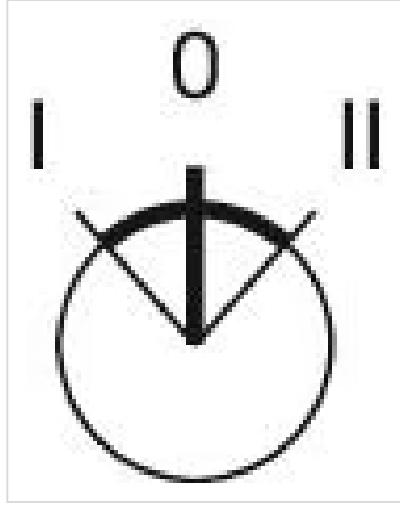
<b>Short Description:</b>	Actuator, Ø 30.5 mm, Ø 38 mm, optional illuminative, White, short, Round, Sand grey, Metal, Maintained - Rest - Maintained, IP66, IP67, IP69K
<b>Housing material:</b>	Metal
<b>Hints:</b>	Front panel thickness 1 ... 6 mm
<b>Switching positions:</b>	

## Wiring diagrams:

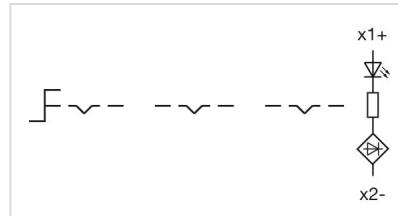

**Dimension drawings:**

