

## Actuator

45-  
2828.4C90.001



[https://www.eao.com/component/45-  
2828.4C90.00...](https://www.eao.com/component/45-2828.4C90.00...)

Your product:

---



45-2828.4C90.001  
Actuator

#### FRONT

Front dimension:	Ø 38 mm
Front form:	Round
Front bezel colour:	Sand grey
Front bezel material:	Metal

#### MOUNTING

Design:	Flush
Mounting cut-out:	Ø 30.5 mm
Mounting type:	Panel mounting

#### OPERATING-/INDICATION PART

Lever colour:	White
Lever material:	plastic
Lever shape:	short

#### MECHANICAL CHARACTERISTICS

Switching action:	Rest - Maintained
Switching positions:	2 positions
Switching angle:	90° right / -45° ... +45°
Mechanical lifetime:	1 Mil. cycles of operation (RCC/RPB)
Operating frequency:	1 800/h
Weight:	0.083 kg


## AMBIENT CONDITION

<b>IP front protection:</b>	IP66, IP67, IP69K
<b>Operating temperature:</b>	– 25 °C ... + 70 °C
<b>Storage temperature:</b>	– 40 °C ... + 80 °C
<b>Shock resistance:</b>	According to IEC 60068-2-27: Sinusoidal half-wave 50 g / 11 ms
<b>Vibration resistance:</b>	According to IEC 60068-2-6: 10 ... 500 Hz: 5 g
<b>Climate resistance:</b>	During operation according to IEC 60721: 3K6, 3C3, 3S2, 3M6


## CERTIFICATE

<b>REACH:</b>	REACH compliant
<b>RoHS:</b>	RoHS compliant

## OTHER
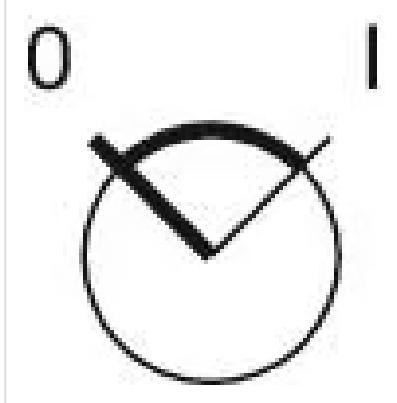
<b>Short Description:</b>	Actuator, Ø 30.5 mm, Ø 38 mm, optional illuminative, White, short, Round, Sand grey, Metal, Rest - Maintained, IP66, IP67, IP69K
<b>Housing material:</b>	Metal
<b>Hints:</b>	Front panel thickness 1 ... 6 mm
<b>Switching positions:</b>	

## Wiring diagrams:

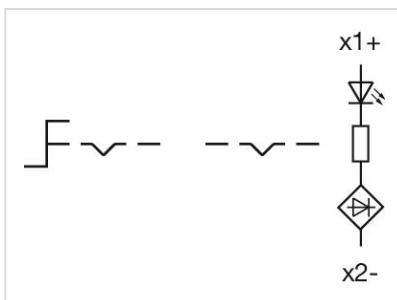

**Dimension drawings:**

