

Actuator

45-
2828.4D20.001



<https://www.eao.com/p/45-2828.4D20.001>

Your product:



45-2828.4D20.001 Actuator

FRONT

Front dimension: Ø 38 mm

Front form: Round

Front bezel colour: Sand grey

Front bezel material: Metal

MOUNTING

Design: Flush

Mounting cut-out: Ø 30.5 mm

Mounting type: Panel mounting

OPERATING-/INDICATION PART

Lever colour: Red

Lever material: plastic

Lever shape: long

ELECTRICAL CHARACTERISTICS

Switching rating:

MECHANICAL CHARACTERISTIC

Switching action: Rest - Maintained

Switching positions: 2 positions

Switching angle: 90° right / -45° ... +45°

Mechanical lifetime:	1 Mil. cycles of operation
Operating frequency:	1 800/h
Weight:	0.085 kg

AMBIENT CONDITION


IP front protection:	IP66, IP67, IP69K
Operating temperature:	– 25 °C ... + 70 °C
Storage temperature:	– 40 °C ... + 80 °C
Shock resistance:	According to IEC 60068-2-27: Sinusoidal half-wave 50 g / 11 ms
Vibration resistance:	According to IEC 60068-2-6: 10 ... 500 Hz: 5 g
Climate resistance:	During operation according to IEC 60721: 3K6, 3C3, 3S2, 3M6

CERTIFICATE


REACH:	REACH compliant
RoHS:	RoHS compliant

OTHER

Short Description:	Actuator, Ø 30.5 mm, Ø 38 mm, optional illuminative, Red, long, Round, Sand grey, Metal, Rest - Maintained, IP66, IP67, IP69K
Housing material:	Metal
Hints:	Front panel thickness 1 ... 6 mm
Switching positions:	

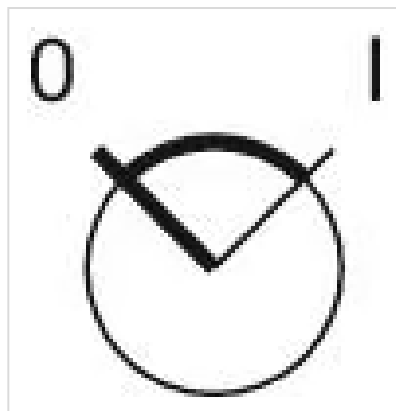

Wiring diagrams:

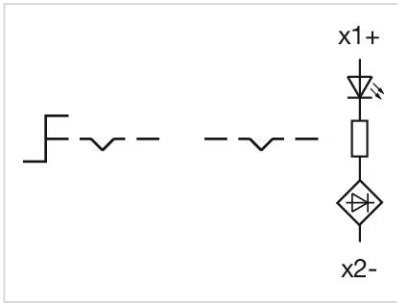

Dimension drawings:

