

# Actuator

45-  
2844.1C90.006



<https://www.eao.com/p/45-2844.1C90.006>

Your product:

---



## 45-2844.1C90.006 Actuator

### FRONT

Front dimension:	Ø 29,5 mm
Front form:	Round
Front bezel colour:	Black
Front bezel material:	Plastic

### MOUNTING

Design:	Raised
Mounting cut-out:	Ø 22.3 mm
Mounting type:	Panel mounting

### OPERATING-/INDICATION PART

Lever colour:	White
Lever material:	plastic
Lever shape:	short

### ELECTRICAL CHARACTERISTICS

Switching rating:

### MECHANICAL CHARACTERISTIC

Switching action:	Rest - Momentary
Switching positions:	2 positions
Switching angle:	45° right

**Mechanical lifetime:** 1 Mil. cycles of operation

**Operating frequency:** 1 800/h

**Weight:** 0.027 kg

#### AMBIENT CONDITION

**IP front protection:** IP66, IP67, IP69K

**Operating temperature:** – 25 °C ... + 70 °C

**Storage temperature:** – 40 °C ... + 80 °C

**Shock resistance:** According to IEC 60068-2-27: Sinusoidal half-wave 50 g / 11 ms

**Vibration resistance:** According to IEC 60068-2-6: 10 ... 500 Hz: 5 g

**Climate resistance:** During operation according to IEC 60721: 3K6, 3C3, 3S2, 3M6

#### CERTIFICATE

**REACH:** REACH compliant

**RoHS:** RoHS compliant


#### OTHER

**Short Description:** Actuator, Ø 22.3 mm, Ø 29,5 mm, optional illuminative, White, short, Round, Black, Plastic, Rest - Momentary, IP66, IP67, IP69K


**Housing material:** Plastic

**Hints:** External diameter of the short lever 32.3 mm


**Switching positions:**

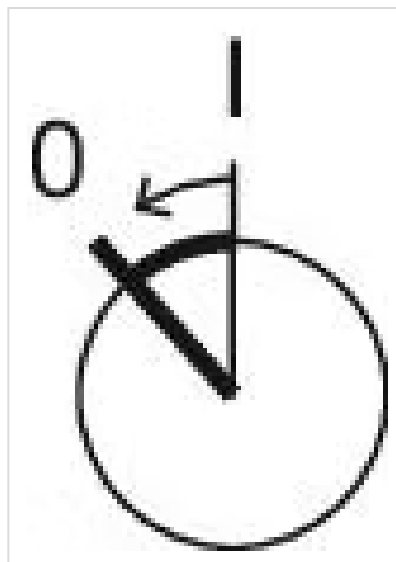

**Wiring diagrams:**

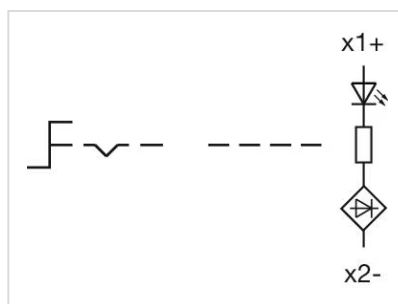

**Mounting cut-outs:**

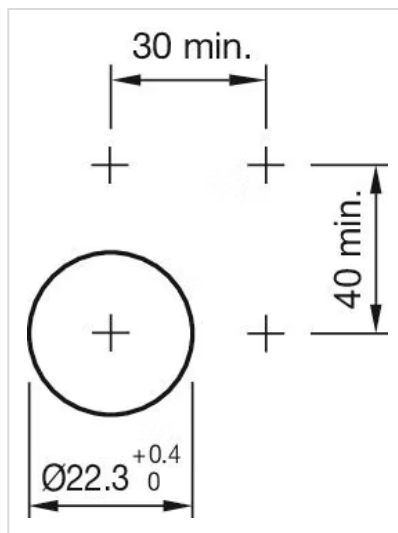

**Dimension drawings:**

