

Actuator

45-
290F.1000.113



<https://www.eao.com/p/45-290F.1000.113>

Your product:



45-290F.1000.113 Actuator

FRONT

Front dimension:	Ø 29,5 mm
Front form:	Round
Front bezel colour:	Black
Front bezel material:	Plastic

MOUNTING

Design:	Raised
Mounting cut-out:	Ø 22.3 mm
Mounting type:	Panel mounting

ELECTRICAL CHARACTERISTICS

Switching rating:

MECHANICAL CHARACTERISTIC

Switching action:	Maintained (a) - Rest (a) - Maintained (a)
Switching positions:	3 positions
Switching angle:	45° left / 45° right / -45° ... +45°
Mechanical lifetime:	1 Mil. cycles of operation
Operating frequency:	1 800/h
Weight:	0.053 kg

AMBIENT CONDITION


IP front protection: IP66, IP67, IP69K
Operating temperature: - 25 °C ... + 70 °C
Storage temperature: - 40 °C ... + 80 °C
Shock resistance: According to IEC 60068-2-27: Sinusoidal half-wave 50 g / 11 ms
Vibration resistance: According to IEC 60068-2-6: 10 ... 500 Hz: 5 g
Climate resistance: During operation according to IEC 60721: 3K6, 3C3, 3S2, 3M6

CERTIFICATE

REACH: REACH compliant
RoHS: RoHS compliant

OTHER


Short Description: Actuator, Ø 22.3 mm, Ø 29,5 mm, Round, Black, Plastic, Maintained (a) - Rest (a) - Maintained (a), IP66, IP67, IP69K
Housing material: Plastic
Hints: The standard lock: RONIS, T254
Switching positions:

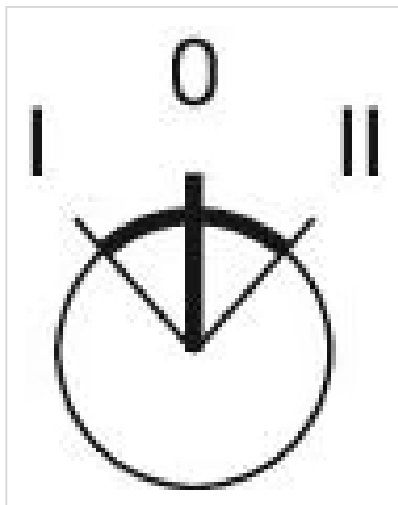

Wiring diagrams:



Mounting cut-outs:

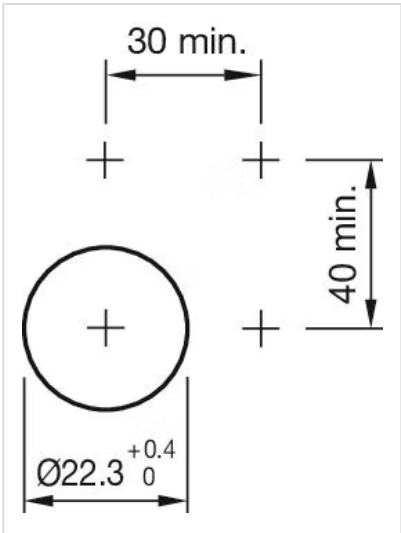

Dimension drawings:

