

Actuator

45-
290G.2000.113



<https://eao.com/p/45-290G.2000.113>

Your product:



45-290G.2000.113 Actuator

FRONT

| | |
|------------------------------|-----------|
| Front dimension: | Ø 29,5 mm |
| Front form: | round |
| Front bezel colour: | Silver |
| Front bezel material: | Metal |

MOUNTING

| | |
|--------------------------|----------------|
| Design: | raised |
| Mounting cut-out: | Ø 22.3 mm |
| Mounting type: | Panel mounting |

MECHANICAL CHARACTERISTIC

| | |
|-----------------------------|----------------------------------------|
| Switching action: | Maintained (a) - Rest (a) - Maintained |
| Switching positions: | 3 positions |
| Switching angle: | 45° left / 45° right / -45° ... +45° |
| Mechanical lifetime: | 1 Mio. cycles of operation |
| Operating frequency: | 1 800/h |
| Weight: | 0.052 kg |

AMBIENT CONDITION

| | |
|-------------------------------|---------------------|
| IP front protection: | IP66, IP67, IP69K |
| Operating temperature: | - 25 °C ... + 70 °C |
| Storage temperature: | - 40 °C ... + 80 °C |

Shock resistance: According to IEC 60068-2-27: Sinusoidal half-wave 50 g / 11 ms

Vibration resistance: According to IEC 60068-2-6: 10 ... 500 Hz: 5 g

Climate resistance: During operation according to IEC 60721: 3K6, 3C3, 3S2, 3M6

CERTIFICATE

REACH: REACH compliant

RoHS: RoHS compliant


OTHER

Short Description: Actuator, Ø 22.3 mm, Ø 29,5 mm, round, Silver, Metal, Maintained (a) - Rest (a) - Maintained, IP66, IP67, IP69K

Housing material: Metal

Hints: The standard lock: RONIS, T254

Switching positions:

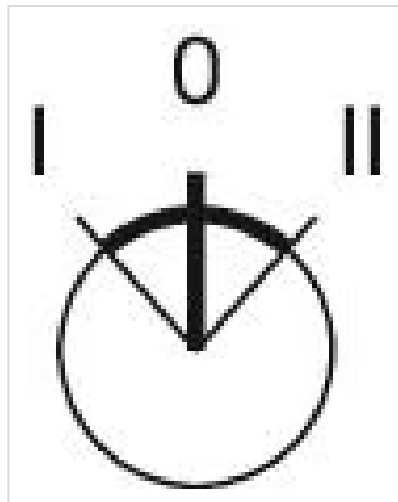

Wiring diagrams:



Mounting cut-outs:



Dimension drawings:

