

Actuator

45-
2C36.1A20.000



<https://eao.com/p/45-2C36.1A20.000>

Your product:



45-2C36.1A20.000 Actuator

FRONT

Front dimension:	Ø 60 mm
Front form:	round
Front bezel colour:	Black
Front bezel material:	Plastic

MOUNTING

Mounting type:	Panel mounting
-----------------------	----------------

OPERATING-/INDICATION PART

Lens colour:	Red
Lens material:	Plastic
Lens illumination:	non illuminative
Lens shape:	mushroom-head
Lens optics:	opaque

MECHANICAL CHARACTERISTIC

Switching action:	Maintained
Release type:	Twist to unlock
Mechanical lifetime:	300 000 cycles of operation
Operating frequency:	Max. 600/h
Weight:	0.066 kg

AMBIENT CONDITION


Operating temperature:	- 25 °C ... + 70 °C
Storage temperature:	- 40 °C ... + 80 °C
Shock resistance:	According to IEC 60068-2-27: Sinusoidal half-wave 50 g / 11 ms
Vibration resistance:	According to IEC 60068-2-6: 2 ... 500 Hz: 5 g
Climate resistance:	During operation according to IEC 60721: 3K6, 3C3, 3S2, 3M6

CERTIFICATE


REACH:	REACH compliant
RoHS:	RoHS compliant

OTHER


Short Description:	Actuator, Ø 60 mm, mushroom-head, non illuminative, Red, Plastic, opaque, round, Black, Plastic, Maintained, Twist to unlock
Dimension:	Ø 60 mm
Housing colour:	Yellow
Housing material:	Plastic
Hints:	Application as per DIN EN ISO 13850 and EN 60204-1
Wiring diagrams:	

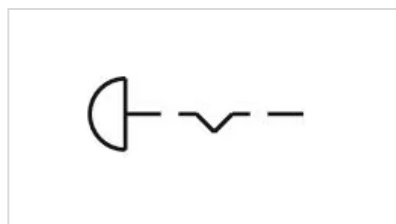



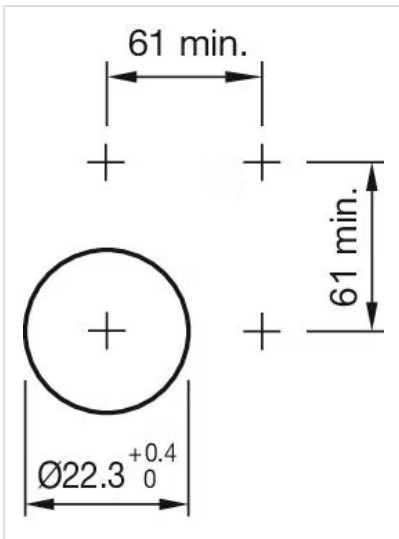



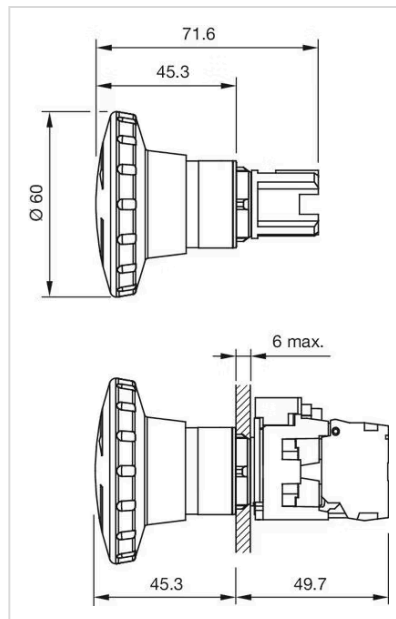



Mounting cut-outs:



Dimension drawings:



Where to Buy

	Distributor	Quantity in Stock	
	Newark	17 in stock	Buy 
	Rapid Electronics	15 in stock	Buy 
	DigiKey	5 in stock	Buy 
	TME	5 in stock	Buy 
	Farnell UK	1 in stock	Buy 

[Show more](#) 

Powered by oemsecrets.com