


Actuator

45-
2J31.25T0.000

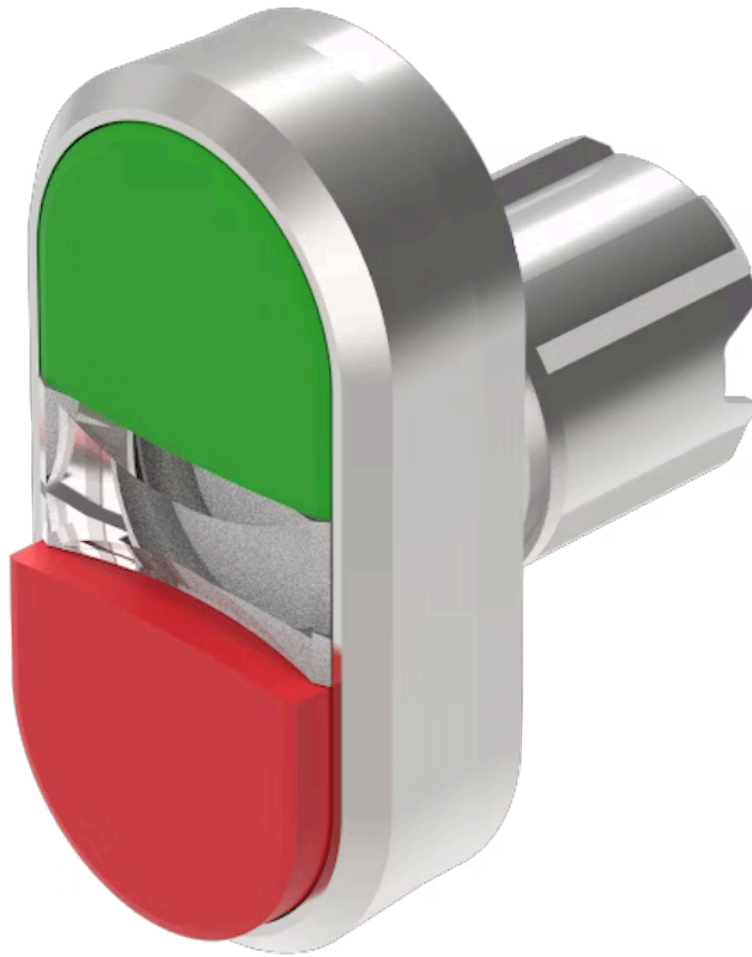

<https://eao.com/p/45-2J31.25T0.000>

Your product:



45-2J31.25T0.000 Actuator

FRONT

Front dimension:	58 mm x 35 mm
Front form:	rectangular
Front bezel colour:	Silver
Front bezel material:	Metal

MOUNTING

Design:	raised
Mounting cut-out:	Ø 22.3 mm
Mounting type:	Panel mounting

OPERATING-/INDICATION PART

Lens colour:	Green-red
Lens material:	Plastic
Lens illumination:	non illuminative
Lens shape:	flush
Lens optics:	opaque

MECHANICAL CHARACTERISTIC

Switching action:	Momentary
Switching system:	Slow-make switching element
Mechanical lifetime:	2 Mio. cycles of operation
Operating frequency:	Max. 3 600/h

Weight: 0.068 kg

AMBIENT CONDITION

IP front protection: IP66, IP67, IP69K

Operating temperature: – 25 °C ... + 70 °C

Storage temperature: – 40 °C ... + 80 °C

Shock resistance: According to IEC 60068-2-27: Sinusoidal half-wave 50 g / 11 ms

Vibration resistance: According to IEC 60068-2-6: 10 ... 500 Hz: 5 g

Climate resistance: During operation according to IEC 60721: 3K6, 3C3, 3S2, 3M6, 3B2

CERTIFICATE

REACH: REACH compliant

RoHS: RoHS compliant


OTHER

Short Description: Actuator, Ø 22.3 mm, 58 mm x 35 mm, flush, non illuminative, Green-red, Plastic, opaque, rectangular, Silver, Metal, Momentary, IP66, IP67, IP69K


Housing colour: Silver

Housing material: Metal

Wiring diagrams:

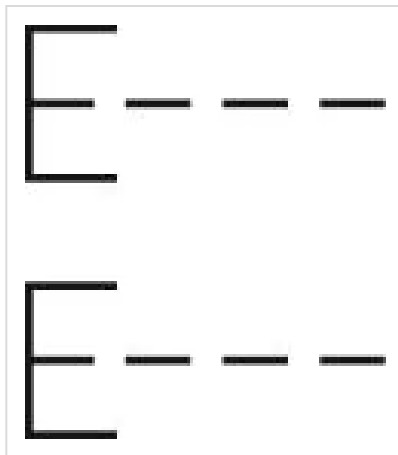


Component layouts:

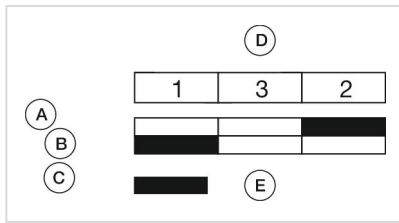

A = Switching action
 B = green (white) button pressed
 C = red (black) button pressed
 D = Arrangement switching element corresponds to designation of front adaptor
 E = Switching element actuated

Mounting cut-outs:

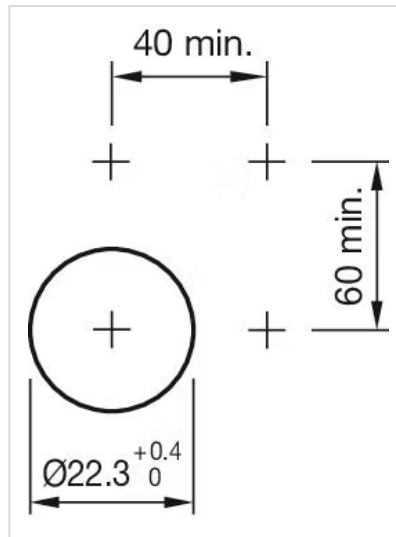

Dimension drawings:

