


# Actuator

45-  
2J31.25T0.000

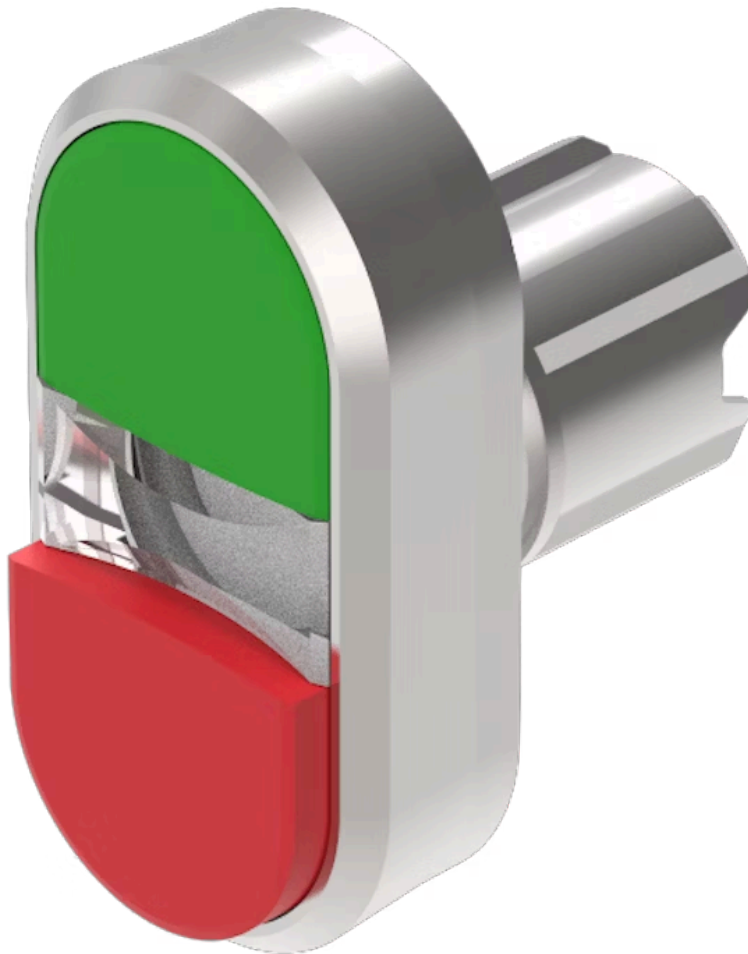

<https://www.eao.com/component/45-2J31.25T0.00...>

Your product:

---



## 45-2J31.25T0.000 Actuator

### FRONT

Front dimension:	58 mm x 35 mm
Front form:	Rectangular
Front bezel colour:	Silver
Front bezel material:	Metal

### MOUNTING

Design:	Raised
Mounting cut-out:	Ø 22.3 mm
Mounting type:	Panel mounting

### OPERATING-/INDICATION PART

Lens colour:	Green-red
Lens material:	Plastic
Lens illumination:	Non illuminated
Lens shape:	Flush
Lens optics:	opaque
Lens type:	Raised above front bezel

### MECHANICAL CHARACTERISTICS

Switching action:	Momentary
Switching system:	Slow-make switching element
Mechanical lifetime:	2 Mil. cycles of operation

**Operating frequency:** Max. 3 600/h

**Weight:** 0.068 kg

## AMBIENT CONDITION

**IP front protection:** IP66, IP67, IP69K

**Operating temperature:** – 25 °C ... + 70 °C

**Storage temperature:** – 40 °C ... + 80 °C

**Shock resistance:** According to IEC 60068-2-27: Sinusoidal half-wave 50 g / 11 ms

**Vibration resistance:** According to IEC 60068-2-6: 10 ... 500 Hz: 5 g

**Climate resistance:** During operation according to IEC 60721: 3K6, 3C3, 3S2, 3M6, 3B2

## CERTIFICATE

**REACH:** REACH compliant

**RoHS:** RoHS compliant


## OTHER

**Short Description:** Actuator, Ø 22.3 mm, 58 mm x 35 mm, Flush, Non illuminated, Green-red, Plastic, opaque, Rectangular, Silver, Metal, Momentary, IP66, IP67, IP69K


**Housing colour:** Silver

**Housing material:** Metal


**Wiring diagrams:**

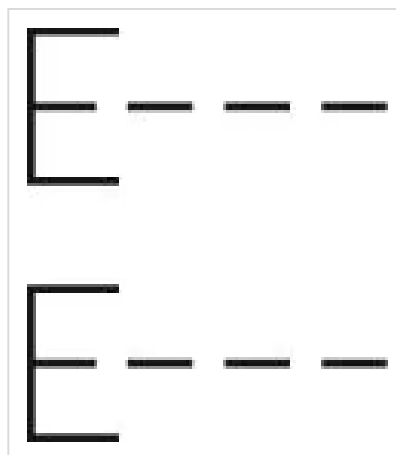

**Component layouts:**

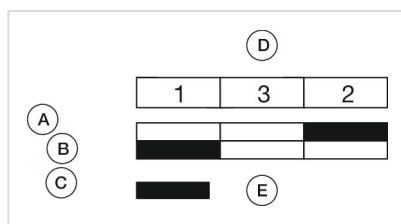

#### Mounting cut-outs:

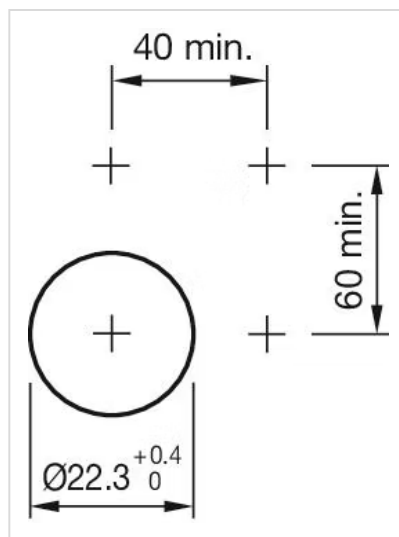

#### Dimension drawings:

