

# Actuator

45-  
2N39.2010.000



<https://www.eao.com/p/45-2N39.2010.000>

Your product:

---



## 45-2N39.2010.000

### Actuator

#### FRONT

Front dimension:	Ø 29,5 mm
Front form:	Round
Front bezel colour:	Silver
Front bezel material:	Metal

#### MOUNTING

Design:	Raised
Mounting cut-out:	Ø 22.3 mm
Mounting type:	Panel mounting

#### OPERATING-/INDICATION PART

Lever colour:	Black
Lever material:	plastic

#### MECHANICAL CHARACTERISTICS

Switching action:	Momentary
Mechanical lifetime:	1 Mil. cycles of operation
Operating frequency:	1 800/h
Weight:	0.038 kg

#### AMBIENT CONDITION

IP front protection:	IP66, IP67, IP69K
----------------------	-------------------


<b>Operating temperature:</b>	– 25 °C ... + 70 °C
<b>Storage temperature:</b>	– 40 °C ... + 80 °C
<b>Shock resistance:</b>	According to IEC 60068-2-27: Sinusoidal half-wave 50 g / 11 ms
<b>Vibration resistance:</b>	According to IEC 60068-2-6: 10 ... 500 Hz: 5 g
<b>Climate resistance:</b>	During operation according to IEC 60721: 3K6, 3C3, 3S2, 3M6

## CERTIFICATE


<b>REACH:</b>	REACH compliant
<b>RoHS:</b>	RoHS compliant

## OTHER

<b>Short Description:</b>	Actuator, Ø 22.3 mm, Ø 29,5 mm, Black, Round, Silver, Metal, Momentary, IP66, IP67, IP69K
<b>Housing material:</b>	Metal
<b>Wiring diagrams:</b>	

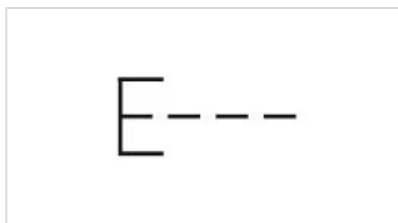

## Mounting cut-outs:

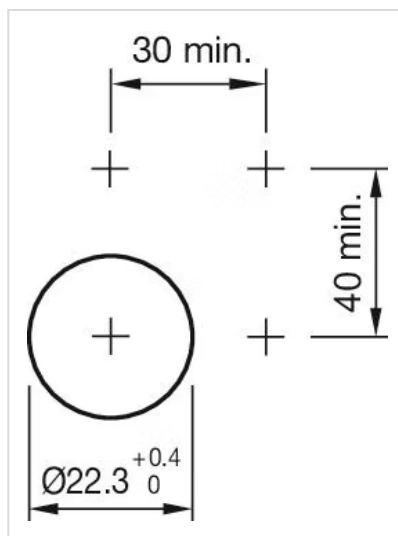

## Dimension drawings:

