

# Actuator

45-  
2T00.10G0.000



<https://www.eao.com/p/45-2T00.10G0.000>

Your product:

---



## 45-2T00.10G0.000 Actuator

### FRONT

**Front dimension:** Ø 30 mm

**Front form:** Round

### MOUNTING

**Design:** Raised

**Mounting cut-out:** Ø 22.3 mm

**Mounting type:** Panel mounting

### OPERATING-/INDICATION PART

**Lens cap colour:** Yellow

**Lens cap material:** Plastic

**Lens cap shape:** flush

**Lens cap optical effect:** transparent

**Illumination colour:** Yellow

### ELECTRICAL CHARACTERISTICS

**Switching rating:**

### MECHANICAL CHARACTERISTIC

**Weight:** 0.012 kg

### AMBIENT CONDITION

<b>IP front protection:</b>	IP66, IP67, IP69K
<b>Operating temperature:</b>	- 25 °C ... + 70 °C
<b>Storage temperature:</b>	- 40 °C ... + 80 °C
<b>Shock resistance:</b>	According to IEC 60068-2-27: Sinusoidal half-wave 50 g / 11 ms
<b>Vibration resistance:</b>	According to IEC 60068-2-6: 2 ... 500 Hz: 5 g
<b>Climate resistance:</b>	During operation according to IEC 60721: 3K6, 3C3, 3S2, 3M6

### CERTIFICATE

**REACH:** REACH compliant


**RoHS:** RoHS compliant

### OTHER


**Short Description:** Actuator, Ø 22.3 mm, Ø 30 mm, Round, IP66, IP67, IP69K, Yellow

**Housing material:** Plastic

**Wiring diagrams:**

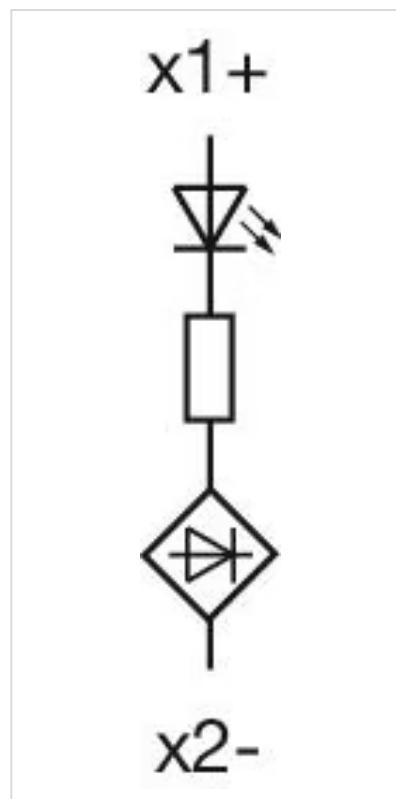

**Mounting cut-outs:**

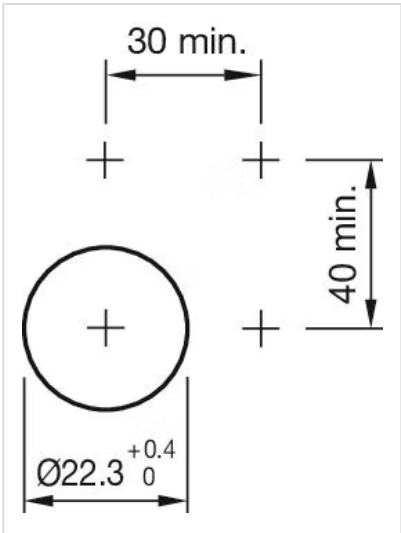

Dimension drawings:

