

# Actuator

45-  
2T07.10K0.000



<https://www.eao.com/p/45-2T07.10K0.000>

Your product:

---



## 45-2T07.10K0.000 Actuator

### FRONT

<b>Front dimension:</b>	Ø 29,5 mm
<b>Front form:</b>	Round
<b>Front bezel colour:</b>	Black
<b>Front bezel material:</b>	Plastic

### MOUNTING

<b>Design:</b>	Raised
<b>Mounting cut-out:</b>	Ø 22.3 mm
<b>Mounting type:</b>	Panel mounting

### OPERATING-/INDICATION PART

<b>Lens colour:</b>	Colourless
<b>Lens material:</b>	Plastic
<b>Lens shape:</b>	Flush
<b>Lens optics:</b>	transparent
<b>Lens type:</b>	Level with front bezel
<b>Lens cap colour:</b>	White
<b>Illumination colour:</b>	White

### ELECTRICAL CHARACTERISTICS

**Switching rating:**

## MECHANICAL CHARACTERISTIC

**Weight:** 0.016 kg

## AMBIENT CONDITION

**IP front protection:** IP66, IP67, IP69K

**Operating temperature:** – 25 °C ... + 70 °C

**Storage temperature:** – 40 °C ... + 80 °C

**Shock resistance:** According to IEC 60068-2-27: Sinusoidal half-wave 50 g / 11 ms

**Vibration resistance:** According to IEC 60068-2-6: 2 ... 500 Hz: 5 g

**Climate resistance:** During operation according to IEC 60721: 3K6, 3C3, 3S2, 3M6

## CERTIFICATE

**REACH:** REACH compliant


**RoHS:** RoHS compliant

## OTHER


**Short Description:** Actuator, Ø 22.3 mm, Ø 29,5 mm, Flush, Colourless, Plastic, transparent, Round, Black, Plastic, IP66, IP67, IP69K, White

**Housing material:** Plastic

**Wiring diagrams:**

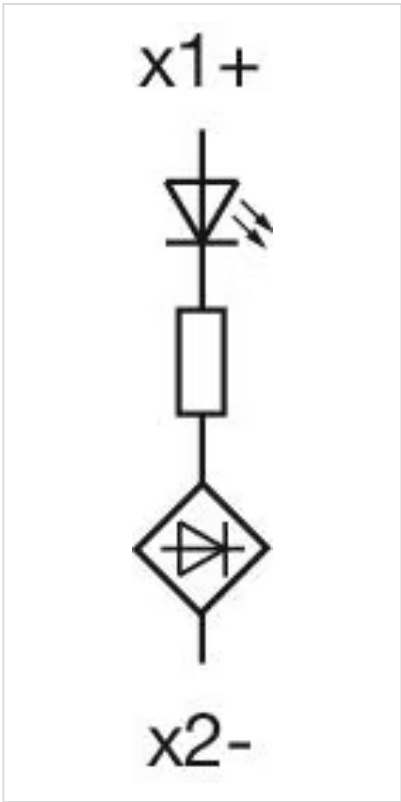

Mounting cut-outs:

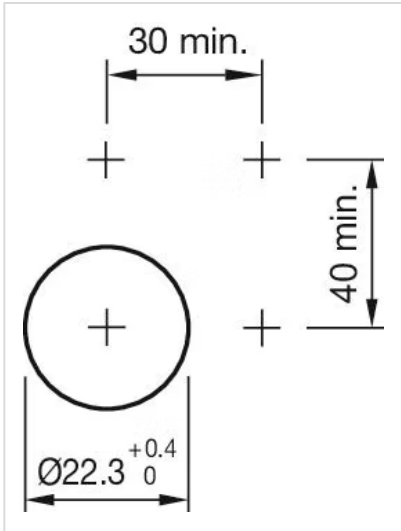

Dimension drawings:

