

Illumination element

45-320.2G11







45-320.2G11 Illumination element

| M | 0 | u | N | ΤI | IN | G |
|---|---|---|---|----|----|---|
| | | | | | | |

Component mounting type: Base mounting

OPERATING-/INDICATION PART

Illumination colour: Yellow

ELECTRICAL CHARACTERISTICS

Operating voltage: 6 - 24 V AC/DC

Surge voltage resistance: 4 kV

Lumi. Intensity: 900 - 1400 mcd

MECHANICAL CHARACTERISTICS

Terminal: Screw terminal

Terminal details 1: Solid 2 x (1.0 ... 1.5mm²)

- With end sleeves 2 x (0.5 ... 0.75 mm²)

Terminal details 2: Finely stranded

Without end sleeves 2 x (0.5 ... 0.75 mm²)Without end sleeves 2 x (0.5 ... 1.5 mm²)

- For AWG cables for auxiliary contacts 2 x (18 ... 14)

Weight: 0.02 kg

CERTIFICATE

REACH: REACH compliant

RoHS: RoHS compliant

OTHER


Short Description:

Illumination element, Screw terminal, Yellow, 6 - 24 V AC/DC, Base mounting

Hints:

Illumination element base mounting can used only with enclosure

Wiring diagrams:

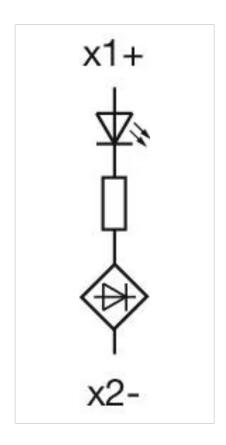

Dimension drawings:

