

# Illumination element

45-320.2H18





https://www.eao.com/component/45-320.2H18/en/il...



# 45-320.2H18 Illumination element

M	O	u	M.	П	N	C

Component mounting type: Base mounting

#### **OPERATING-/INDICATION PART**

Illumination colour: Green

#### **ELECTRICAL CHARACTERISTICS**

Operating voltage: 230 V AC

Surge voltage resistance: 4 kV

Lumi. Intensity: 900 - 1400 mcd

#### **MECHANICAL CHARACTERISTICS**

Terminal: Screw terminal

Terminal details 1: Solid 2 x (1.0 ... 1.5mm<sup>2</sup>)

- With end sleeves 2 x (0.5 ... 0.75 mm<sup>2</sup>)

Terminal details 2: Finely stranded

- Without end sleeves 2 x (0.5  $\dots$  0.75 mm<sup>2</sup>) - Without end sleeves 2 x (0.5  $\dots$  1.5 mm<sup>2</sup>)

- For AWG cables for auxiliary contacts 2 x (18 ... 14)

Weight: 0.02 kg

#### CERTIFICATE

**REACH:** REACH compliant

RoHS: RoHS compliant

## **OTHER**


**Short Description:** 

Illumination element, Screw terminal, Green, 230 V AC, Base mounting

Hints:

Illumination element base mounting can used only with enclosure

Wiring diagrams:

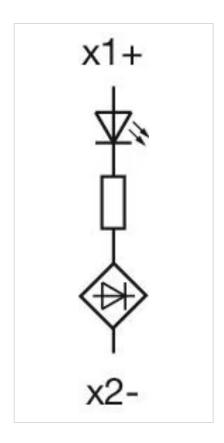

## Dimension drawings:

