


# Actuator

51-  
252.026

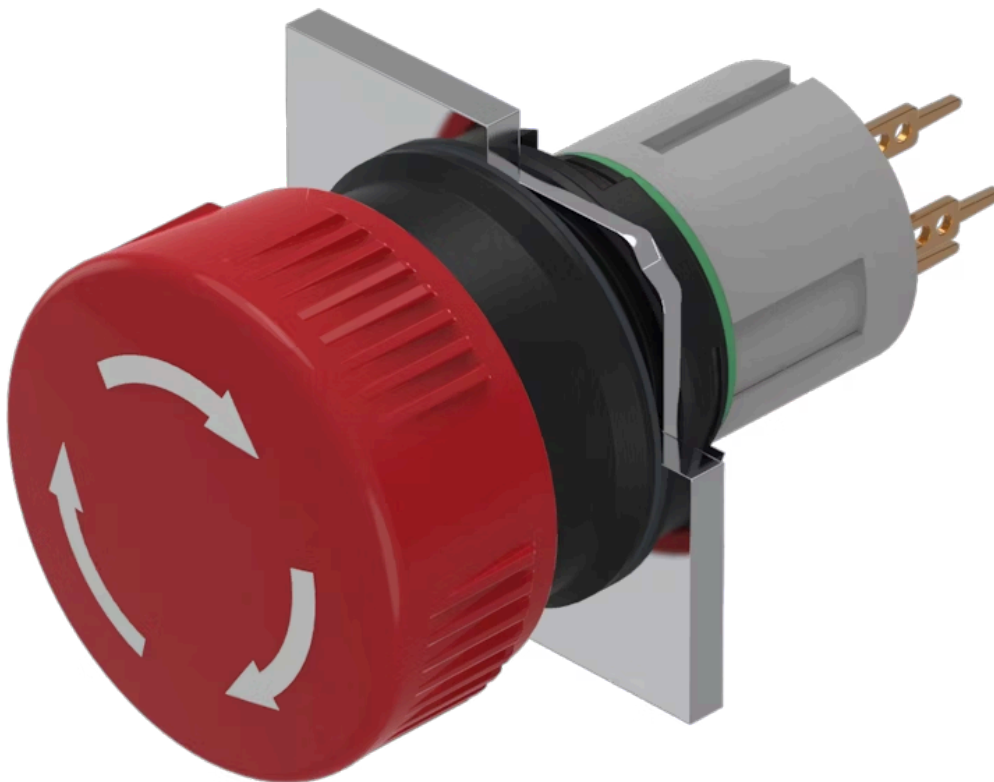

<https://eao.com/p/51-252.026>

Your product:

---



## 51-252.026 Actuator

### FRONT

**Front dimension:** Ø 24,5 mm

**Front form:** round

### MOUNTING

**Design:** raised

**Mounting type:** Panel mounting

### OPERATING-/INDICATION PART

**Lens colour:** Red

**Lens material:** Plastic

**Lens illumination:** non illuminative

**Lens shape:** mushroom-head

**Lens optics:** opaque

### ELECTRICAL CHARACTERISTICS

**Contacts:** 2 NC

**Switching voltage and switching current:** 100 mA at 42 VAC/VDC

### MECHANICAL CHARACTERISTIC

**Terminal:** Universal terminal, 2 x 0.5 mm

**Contact material:** Gold

**Switching action:** Maintained

<b>Switching system:</b>	Low-level element
<b>Switching system:</b>	This low-level switching element was designed for switching low powers in electronic circuits. The mechanism assures reliable switching of loads ranging from a few $\mu\text{A}/\mu\text{V}$ up to 100 mA/ 42 VAC/DC. Single-break momentary contact, as normally open or normally closed with 4 independent points of contact. 2 momentary contacts per switching element; combination of normally open and normally closed is possible. Special features are the long life, extremely short rebound time and stable contact resistance.
<b>Mechanical lifetime:</b>	1 Mio. cycles of operation
<b>Operating force:</b>	18 ... 21 N (depending on the switching element)
<b>Operating Travel:</b>	3 mm
<b>Tightening torque:</b>	Fixing nut max. 0.5 Nm
<b>Weight:</b>	0.011 kg

### AMBIENT CONDITION


<b>IP front protection:</b>	IP65, according to DIN EN 60529
<b>Operating temperature:</b>	- 25 °C ... + 55 °C
<b>Storage temperature:</b>	- 40 °C ... + 85 °C

### CERTIFICATE


<b>REACH:</b>	REACH compliant
<b>RoHS:</b>	RoHS compliant

### OTHER


<b>Short Description:</b>	Actuator, $\varnothing$ 24,5 mm, mushroom-head, non illuminative, Red, Plastic, opaque, round, 2 NC, Maintained, Universal terminal, 2 x 0.5 mm, IP65, according to DIN EN 60529
<b>Housing colour:</b>	Black
<b>Hints:</b>	Marking arrows
<b>Wiring diagrams:</b>	

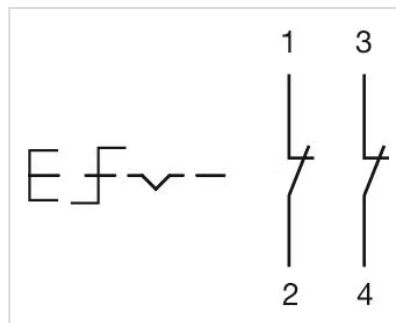

**Mounting cut-outs:**

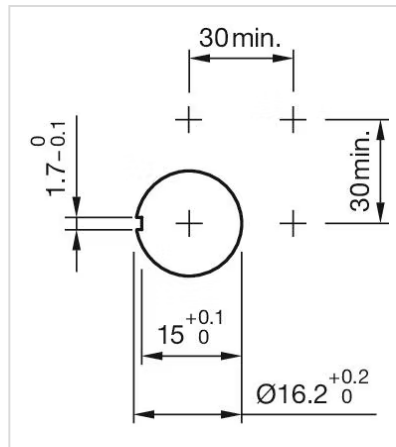



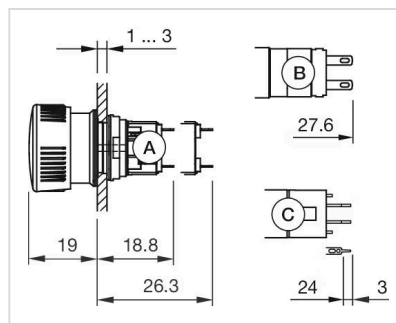







**Dimension drawings:**



- A = Solder terminal
- B = Plug-in terminal 2.8 mm x 0.5 mm
- C = Universal terminal 2.0 mm x 0.5 mm

Where to Buy

	Distributor	Quantity in Stock	
	DigiKey	1038 in stock	<a href="#">Buy</a> 
	Distrelec	85 in stock	<a href="#">Buy</a> 
	Mouser Electronics	65 in stock	<a href="#">Buy</a> 
	TME	64 in stock	<a href="#">Buy</a> 
	Farnell UK	36 in stock	<a href="#">Buy</a> 

[Show more](#) 

Powered by oemsecrets.com