

# Actuator

61-0029.0



<https://www.eao.com/component/61-0029.0/en/ac...>

Your product:

---



## 61-0029.0 Actuator

### FRONT

<b>Front dimension:</b>	18 mm
<b>Front form:</b>	Square
<b>Front bezel colour:</b>	Black
<b>Front bezel material:</b>	Plastic

### MOUNTING

<b>Mounting type:</b>	Panel mounting
-----------------------	----------------

### MECHANICAL CHARACTERISTICS

<b>Tightening torque:</b>	Max. 0.5 Nm
<b>Weight:</b>	0.004 kg

### AMBIENT CONDITION

<b>IP Protection:</b>	IP40 rear side, according to EN IEC 60529, IP67 front side, according to EN IEC 60529
<b>Operating temperature:</b>	- 25 °C ... + 55 °C
<b>Storage temperature:</b>	- 40 °C ... + 85 °C

### CERTIFICATE

<b>REACH:</b>	REACH compliant
<b>RoHS:</b>	RoHS compliant

### OTHER

**Short Description:** Actuator, 18 mm, Square, Black, Plastic


**Dimension:** 18 mm x 18 mm

**Internal size:** 15,3 mm x 15,3 mm


**Housing colour:** Black

**Housing material:** Plastic, according to UL 94 V0, self-extinguishing

**Wiring diagrams:**

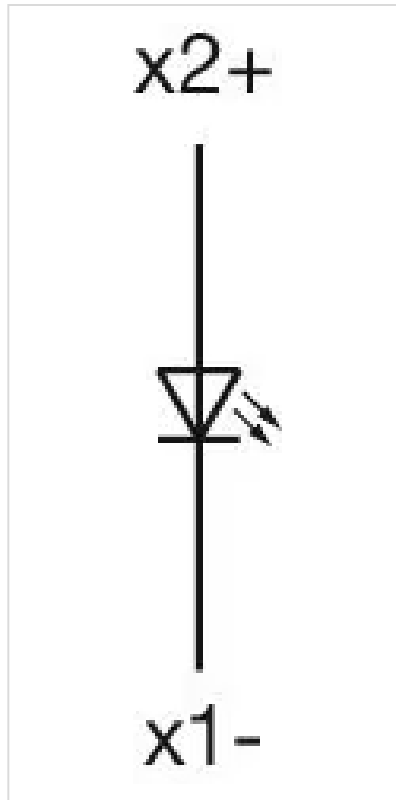


**Mounting cut-outs:**

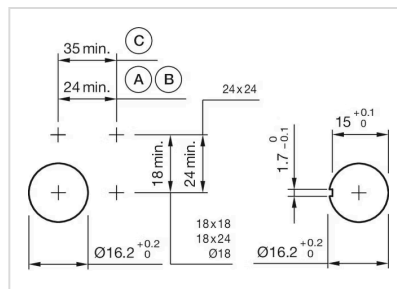

A = Solder/Plug-in terminal 2.8 mm x 0.5 mm  
 B = Solder terminal  
 C = Screw terminal

**Dimension drawings:**

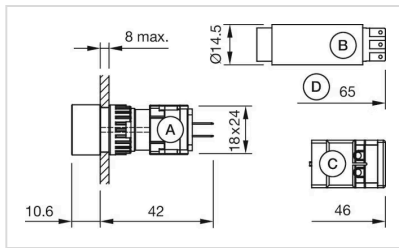

- A = Plug-in terminal 2.8 mm x 0.5 mm
- B = Solder terminal
- C = Screw terminal
- D = Flasher
- E = Slow-make switching element
- F = Snap-action switching element