

Actuator

61-
4970.10



<https://eao.com/p/61-4970.10>

Your product:



61-4970.10 Actuator

FRONT

| | |
|------------------------------|---------|
| Front dimension: | Ø 25 mm |
| Front bezel colour: | Black |
| Front bezel material: | Plastic |
| Front form: | round |

MOUNTING

| | |
|--------------------------|----------------|
| Mounting cut-out: | Ø 22.3 mm |
| Mounting type: | Panel mounting |

ELECTRICAL CHARACTERISTICS

| | |
|--------------------|-------|
| Resistance: | 10 kΩ |
|--------------------|-------|

MECHANICAL CHARACTERISTIC

| | |
|---------------------------|-------------------|
| Terminal: | Flat ribbon cable |
| Weight: | 0.016 kg |
| Tightening torque: | Max. 0.5 Nm |

AMBIENT CONDITION

| | |
|-------------------------------|---------------------|
| Operating temperature: | - 25 °C ... + 55 °C |
| IP front protection: | IP65 |

CERTIFICATE

RoHS: RoHS compliant


REACH: REACH compliant

OTHER

Short Description: Actuator, Ø 22.3 mm, Ø 25 mm, round, Black, Plastic, Flat ribbon cable, IP65


Housing material: Plastic

Component layouts:

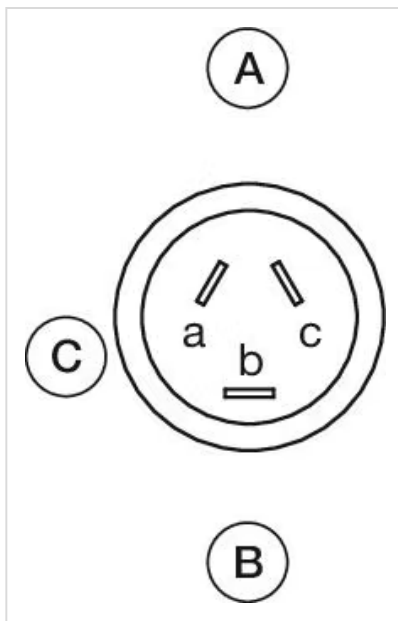


A = Terminals (rear side)
B = Conductor colour of flat ribbon cable
C = a = blue, b = red, c = yellow

Wiring diagrams:

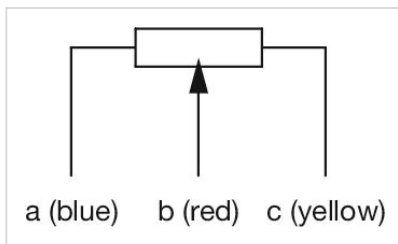

A = blue
B = red
C = yellow

Dimension drawings:

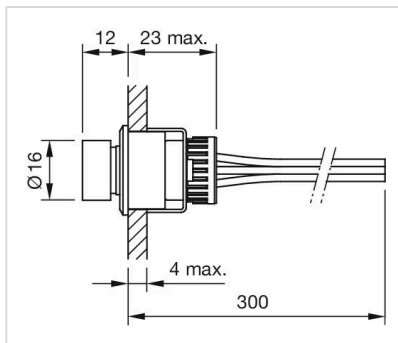

Mounting cut-outs:

