

# Switching element

61-8775.11



<https://www.eao.com/component/61-8775.11/en/s...>

Your product:

---



## 61-8775.11 Switching element

### ELECTRICAL CHARACTERISTICS

**Switching voltage and switching current:**

Switch rating AC with silver contact		
Service category AC-15		
according to EN IEC 60947-5-1		
Voltage	125 VAC	250 VAC
Current	3 A	2 A
Switch rating DC with silver contact		
Service category DC-13		
according to EN IEC 60947-5-1		
Voltage	250 VDC	
Current	0.2 A	

**Contacts:**

1 NC / 1 NO

**Contact resistance:**

New state  $\leq 50 \text{ m}\Omega$ , as per DIN/IEC 60512-2-4, measured at 100 mA, 10 V

**Forward voltage:**

**Rated Operational Voltage  $U_e$ :**

250 VAC/DC according to EN IEC 60947-1

**Rated impulse withstand voltage  $U_{imp}$ :**

4 kV, according to EN/IEC 60947-5-1

**Rated insulation voltage  $U_i$ :**

320 VAC, according to EN / IEC 60947-5-1

**Short circuit protective device:**

fuse / 500 V / 10 A / gG

**Rated short-circuit current caused:**

AC: 1 kA  
DC: 1 kA

**Recommended minimum operational data:**

Voltage	20 VAC/DC
Current	100 mA

**Switching rating:**

250 V AC/DC @ 5 A

**Electrical lifetime:**

$\geq 50\,000$  cycles of operation at 250VAC, 2A,  $\cos\phi$  0.95,

**Electric strength:**

4000 VAC, 50 Hz, 1 minute, as per DIN / IEC 60512-2 between all terminals and earth

**Overvoltage category:**

III, according to EN / IEC 60947-5-1

**Pollution degree:**

3, according to EN IEC 60947-1

**Protection class:**

II, according to EN / IEC 61058-1

**Standards:**

The switches comply with the "Standards for low-voltage switching devices" EN IEC 60947-5-1

**Thermal current I<sub>th</sub>:** 5 A, according to EN / IEC 60947-5-1

## MECHANICAL CHARACTERISTICS

**Terminal:** Screw terminal

**Contact material:** Silver

**Switching system:** Slow-make switching element

**Switching system:** Double-break slow-make system, contact opening width 2 x 1.5 mm, with 2 x 2 contact points per switching element.  
NC-contact elements in the slow-make elements fulfill requirements of switches with forced opening as per EN / IEC 60947-5-12.17.

**Switching positions:** 3 positions

**Wire cross section:**  
1 wire flexible: 0.5 ... 0.75 mm<sup>2</sup>  
1 wire super flexible: 0.5 mm<sup>2</sup>  
1 wire rigid: 0.5 ... 1.5 mm<sup>2</sup>  
2 wires super flexible: 0.5 mm<sup>2</sup>  
2 wires flexible: 0.5 mm<sup>2</sup>  
2 wires rigid: 0.75 mm<sup>2</sup>

**Weight:** 0.016 kg

## AMBIENT CONDITION

**IP Protection:** IP40

**Operating temperature:** – 25 °C ... + 55 °C

**Storage temperature:** – 40 °C ... + 85 °C

**Shock resistance:** Max. 100 m / s<sup>2</sup>, pulse width, 3-axis (sinusoidal EN IEC 60068-2-27)

**Vibration resistance:** Max. 100 m / s<sup>2</sup> from 10 Hz ... 500 Hz, (sinusoidal EN IEC 60068-2-6)

**Climate resistance:**  
Damp heat, cyclic: 96 hours, + 25 °C/97 %, + 55 °C/93 % relative humidity, as per EN IEC 60068-2-30  
Damp heat, steady: 56 days, + 40 °C/93 % relative humidity, according to EN IEC 60068-2-78  
Rapid change of temperature: 100 cycles, – 40 °C ... + 80 °C, as per EN / IEC 60068-2-14

## CERTIFICATE

**Approbations:** CB (IEC 61058-1), CQC, CSA, DNV, ENEC (EN 61058-1), UL, VDE

**Conformities:** CE, UKCA, 2011 / 65 / EC (RoHS), 2014 / 35 / EU (LVD)

**REACH:** REACH compliant

**RoHS:** RoHS compliant

## OTHER

**Short Description:**

Switching element, Slow-make switching element, 250 V AC/DC @ 5 A, Silver, 1 NC / 1 NO, Screw terminal

**Material:**

Plastic, according to UL 94 V0


**Product attributes:**

Without lamp terminal

**Hints:**

Without lamp terminal

**Wiring diagrams:**

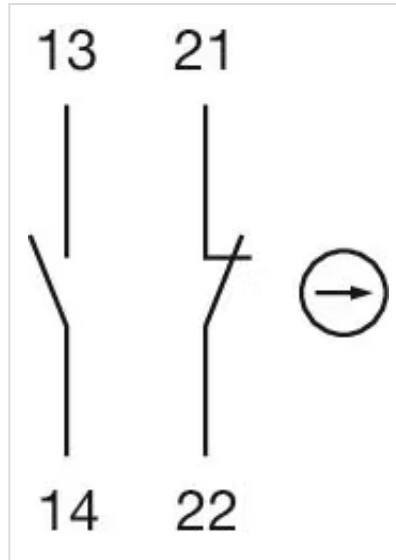

**Component layouts:**

