

# Switching element

70-220.6S



<https://www.eao.com/p/70-220.6S>

Your product:

---



## 70-220.6S

### Switching element

#### OPERATING-/INDICATION PART

**Illumination colour:** Blue

#### ELECTRICAL CHARACTERISTICS

**Contacts:** 1 NO

**Switching rating:** 42 V DC @ 0,1 A

**Lumi. Intensity:** 250 mcd

#### MECHANICAL CHARACTERISTICS

**Terminal:** PCB terminal

**Contact material:** Gold

**Switching action:** Momentary

**Switching system:** Short-travel element

**Weight:** 0.001 kg

#### CERTIFICATE

**REACH:** REACH compliant


**RoHS:** RoHS compliant

#### OTHER


**Short Description:** Switching element, Short-travel element, 42 V DC @ 0,1 A, Gold, 1 NO, PCB terminal

**Hints:** The customer has to decide what series resistor shall be used to the LED

**Wiring diagrams:**

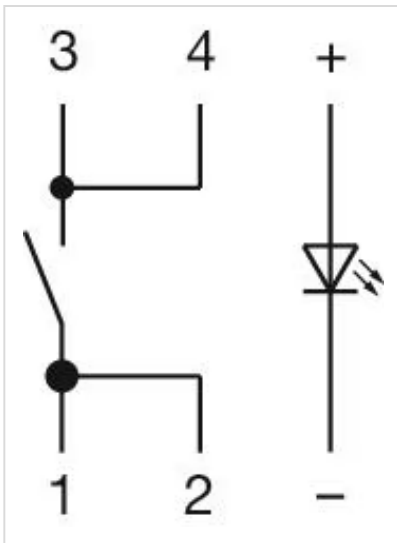

### Component layouts:

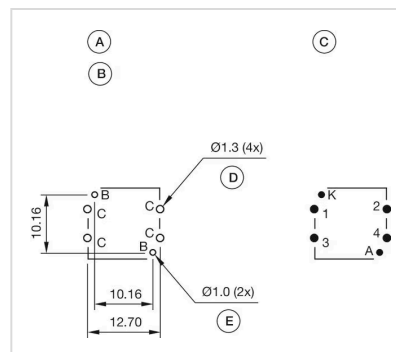

A = Switching element with illumination  
 B = Single LED  
 C = Drilling plan (component side)  
 D = Hole for switching element, pad max.  
 Ø 2.5 mm  
 E = Hole for LED

### Dimension drawings:

