

Actuator

704.002.2







704.002.2 Actuator

	_	$\overline{}$	ĸ.	-	
ы.	к	()	N		

Front dimension: Ø 29 mm

Front form: Round

Front bezel colour: Grey

Front bezel material: Plastic

MOUNTING

Design: Raised

Mounting type: Panel mounting

OPERATING-/INDICATION PART

Lens colour: Red

Lens material: Plastic

Lens shape: Flush

Lens optics: transparent

Marking plate colour: White

Marking plate optics: translucent


Marking plate illumination: illuminative

ELECTRICAL CHARACTERISTICS


Standards: The switches comply with the "Standards for low-voltage switching devices" DIN


EN 60947-1

Terminal:	Screw terminal		
Weight:	0.05 kg		
AMBIENT CONDITION			
IP Protection:	IP65 front side		
Operating temperature:	– 40 °C + 55 °C		
Storage temperature:	– 40 °C + 85 °C		
CERTIFICATE			
REACH:	REACH compliant		
RoHS:	RoHS compliant		
OTHER			
Short Description:	Actuator, \emptyset 29 mm, Flush, Red, Plastic, transparent, Round, Grey, Plastic, Screw terminal		
Housing colour:	Grey		
Housing material:	Plastic		
Hints:	Filament lamp or LED		
Wiring diagrams:			

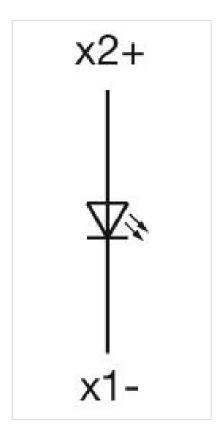


Mounting cut-outs:






A = Screw terminal B = Push-in terminal (PIT)

Dimension drawings:





A = Screw terminal