

# Actuator

704.003.2







# 704.003.2 Actuator

	~	N IN	
-	Κι.	JΝ	

Front dimension: Ø 29 mm

Front form: Round

Front bezel colour: Grey

Front bezel material: Plastic

### **MOUNTING**

Design: Raised

Mounting type: Panel mounting

## **OPERATING-/INDICATION PART**

Lens colour: Red

Lens material: Plastic

Lens shape: Flush

Lens optics: transparent

Marking plate colour: Colourless

Marking plate optics: transparent

Marking plate illumination: illuminative

# **ELECTRICAL CHARACTERISTICS**

Standards: The switches comply with the "Standards for low-voltage switching devices" DIN

EN 60947-1

Terminal: Screw terminal

Weight: 0.037 kg

### **AMBIENT CONDITION**

**IP Protection:** IP65 front side

**Operating temperature:**  $-40 \, ^{\circ}\text{C} \, ... + 55 \, ^{\circ}\text{C}$ 

Storage temperature: - 40 °C ... + 85 °C

# CERTIFICATE

**REACH:** REACH compliant

RoHS: RoHS compliant

### **OTHER**


Short Description: Actuator, Ø 29 mm, Flush, Red, Plastic, transparent, Round, Grey, Plastic,

Screw terminal


Housing colour: Grey

Housing material: Plastic


Wiring diagrams:

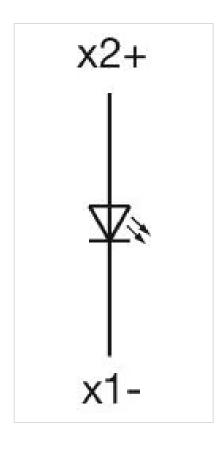


# Mounting cut-outs:



A = Screw terminal B = Push-in terminal (PIT)



Dimension drawings:



A = Screw terminal

