

Actuator

704.006.4



<https://www.eao.com/p/704.006.4>

Your product:



704.006.4 Actuator

FRONT

Front dimension:	Ø 29 mm
Front form:	Round
Front bezel colour:	Black
Front bezel material:	Plastic

MOUNTING

Design:	Raised
Mounting type:	Panel mounting

OPERATING-/INDICATION PART

Lens colour:	Yellow
Lens material:	Plastic
Lens shape:	Flush
Lens optics:	transparent
Marking plate colour:	White
Marking plate optics:	translucent
Marking plate illumination:	illuminative

ELECTRICAL CHARACTERISTICS

Switching rating:

Standards: The switches comply with the "Standards for low-voltage switching devices" DIN EN 60947-1

MECHANICAL CHARACTERISTIC

Terminal: Screw terminal
Weight: 0.05 kg

AMBIENT CONDITION


IP Protection: IP65 front side
Operating temperature: - 40 °C ... + 55 °C
Storage temperature: - 40 °C ... + 85 °C

CERTIFICATE


REACH: REACH compliant
RoHS: RoHS compliant

OTHER


Short Description: Actuator, Ø 29 mm, Flush, Yellow, Plastic, transparent, Round, Black, Plastic, Screw terminal
Housing colour: Grey
Housing material: Plastic
Hints: Filament lamp or LED
Wiring diagrams:

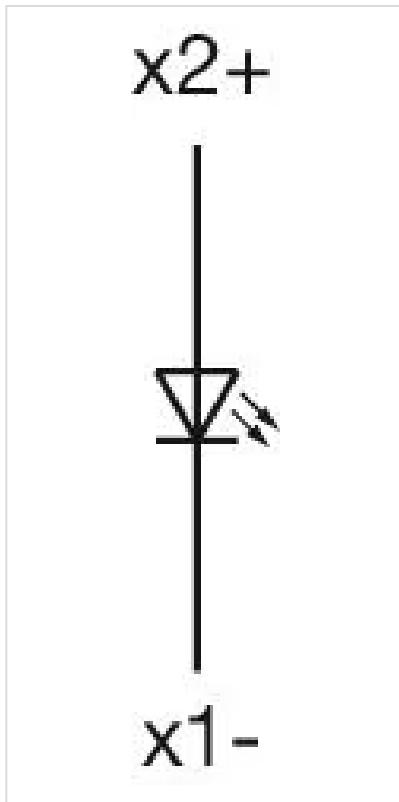

Mounting cut-outs:

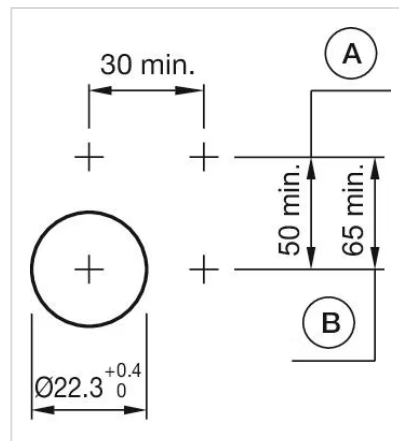

A = Screw terminal
B = Push-in terminal (PIT)

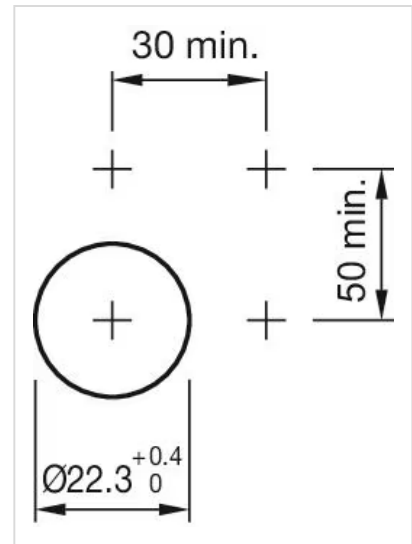

Dimension drawings:

A = Screw terminal

