


# Actuator

704.009.5

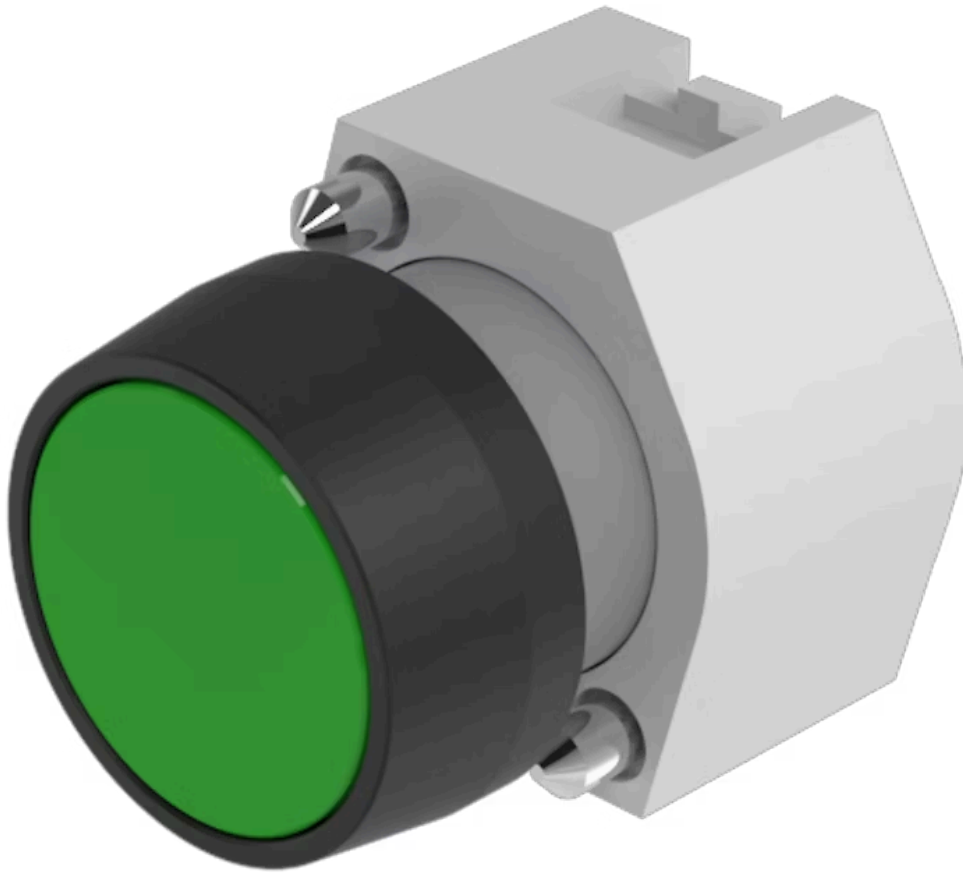

<https://www.eao.com/p/704.009.5>

Your product:

---



## 704.009.5 Actuator

### FRONT

|                              |         |
|------------------------------|---------|
| <b>Front dimension:</b>      | Ø 29 mm |
| <b>Front form:</b>           | Round   |
| <b>Front bezel colour:</b>   | Black   |
| <b>Front bezel material:</b> | Plastic |

### MOUNTING

|                       |                |
|-----------------------|----------------|
| <b>Design:</b>        | Raised         |
| <b>Mounting type:</b> | Panel mounting |

### OPERATING-/INDICATION PART

|                           |                 |
|---------------------------|-----------------|
| <b>Lens colour:</b>       | Green           |
| <b>Lens material:</b>     | Plastic         |
| <b>Lens illumination:</b> | Non illuminated |
| <b>Lens shape:</b>        | Flush           |
| <b>Lens optics:</b>       | transparent     |

### ELECTRICAL CHARACTERISTICS

|                          |   |
|--------------------------|---|
| <b>Switching rating:</b> |   |
| <b>Standards:</b>        | The switches comply with the "Standards for low-voltage switching devices" DIN EN 60947-1 |

### MECHANICAL CHARACTERISTIC

|                          |           |
|--------------------------|-----------|
| <b>Switching action:</b> | Momentary |
|--------------------------|-----------|

|                             |                             |
|-----------------------------|-----------------------------|
| <b>Mechanical lifetime:</b> | ≤3 Mil. cycles of operation |
| <b>Operating force:</b>     | 8 N                         |
| <b>Operating Travel:</b>    | ca. 5.8 mm ± 0.2 mm         |
| <b>Weight:</b>              | 0.04 kg                     |

### AMBIENT CONDITION


|                               |                     |
|-------------------------------|---------------------|
| <b>IP Protection:</b>         | IP65 front side     |
| <b>Operating temperature:</b> | - 40 °C ... + 55 °C |
| <b>Storage temperature:</b>   | - 40 °C ... + 85 °C |

### CERTIFICATE


|               |                 |
|---------------|-----------------|
| <b>REACH:</b> | REACH compliant |
| <b>RoHS:</b>  | RoHS compliant  |

### OTHER

|   |   |
|---|---|
| <b>Short Description:</b>                 | Actuator, Ø 29 mm, Flush, Non illuminated, Green, Plastic, transparent, Round, Black, Plastic, Momentary                        |
| <b>Housing colour:</b>                    | Grey  |
| <b>Housing material:</b>                  | Plastic   |
| <b>Product attributes:</b>                | Frontring with protective cover to be mounted with a torque of 0.4 Nm onto actuator   |
| <b>Hints:</b>                             | Frontring with protective cover to be mounted with a torque of 0.4 Nm onto actuator,Max. 3 switching elements can be clipped on |
| <b>max. number of switching elements:</b> | 3   |
| <b>Wiring diagrams:</b>                   |   |

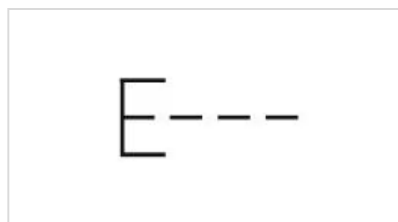


**Mounting cut-outs:**

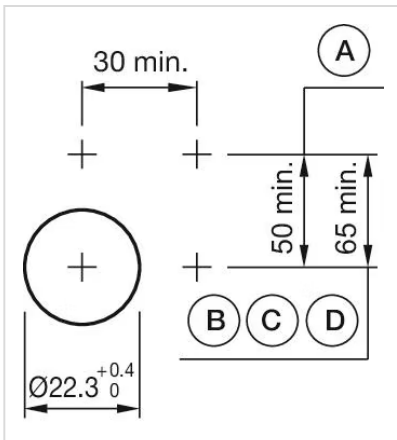

A = Screw terminal  
 B = Push-in terminal (PIT)  
 C = Plug-in terminal 6.3 mm x 0.8 mm  
 D = Double plug-in terminal 6.3 mm x 0.8 mm

**Dimension drawings:**

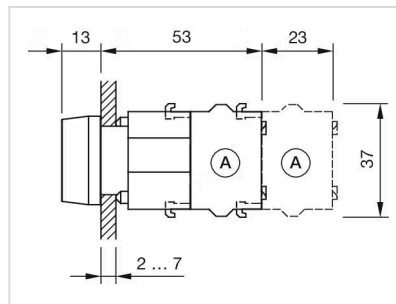

A = Screw terminal