

# Actuator

704.021.7







## 704.021.7 Actuator

FRONT
-------

Front dimension: Ø 29 mm

Front form: Round

#### **MOUNTING**

Design: Raised

Mounting type: Panel mounting

## **OPERATING-/INDICATION PART**

Lens cap colour: Colourless

Lens cap material: Plastic

Lens cap optical effect: transparent

Marking cap colour: Colourless

Marking cap optics: transparent

Marking cap surface: ribbed

## **ELECTRICAL CHARACTERISTICS**

Standards: The switches comply with the "Standards for low-voltage switching devices" DIN

EN 60947-1

## **MECHANICAL CHARACTERISTICS**

Terminal: Screw terminal

**Weight:** 0.023 kg

## **AMBIENT CONDITION**

**IP Protection:** IP65 front side

**Operating temperature:**  $-40 \, ^{\circ}\text{C} \, ... + 55 \, ^{\circ}\text{C}$ 

Storage temperature:  $-40 \, ^{\circ}\text{C} \dots + 85 \, ^{\circ}\text{C}$ 

### **CERTIFICATE**

**REACH:** REACH compliant

RoHS: RoHS compliant


### **OTHER**

**Short Description:** Actuator, Ø 29 mm, Round, Screw terminal


Housing colour: Grey

Housing material: Plastic

Wiring diagrams:

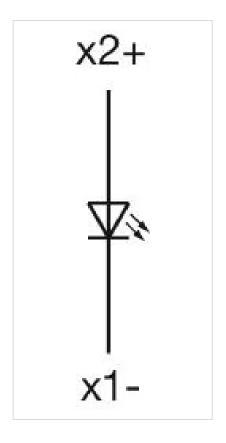

Mounting cut-outs:



## Dimension drawings:

