


Actuator

704.343.0



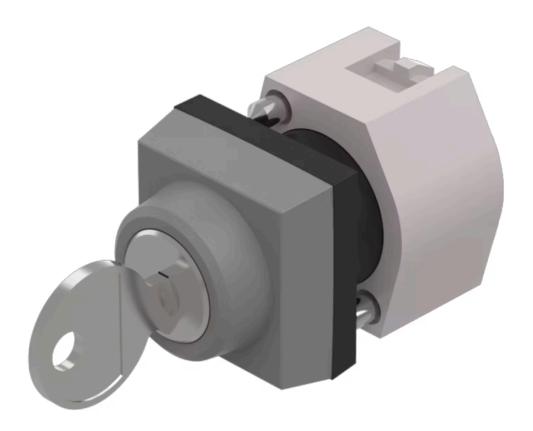

Your product:



704.343.0 Actuator

| _ | _ | | K1 | - |
|---|---|---|----|---|
| г | н | U | IN | ш |

Front dimension: 30 mm x 30 mm

Front form: Square

Front bezel colour: Grey

Front bezel material: Plastic

MOUNTING

Design: Raised

Mounting type: Panel mounting

ELECTRICAL CHARACTERISTICS

Standards: The switches comply with the "Standards for low-voltage switching devices" DIN

EN 60947-1

MECHANICAL CHARACTERISTICS

Switching action: Rest (a) - Momentary

Switching positions: 2 positions

Switching angle: 42° right

Mechanical lifetime: ≤50 000 cycles of operation

Weight: 0.064 kg

AMBIENT CONDITION

IP Protection: IP65 front side

Operating temperature: $-40 \, ^{\circ}\text{C} \, ... + 55 \, ^{\circ}\text{C}$

| Storage temperature: | – 40 °C + 85 °C |
|----------------------|-----------------|
| | |

CERTIFICATE

REACH: REACH compliant

RoHS: RoHS compliant

OTHER

Short Description: Actuator, 30 mm x 30 mm, Square, Grey, Plastic, Rest (a) - Momentary

Hints: The standard lock Ronis 251

Further lock numbers on request


Max. 3 switching elements can be clipped on

max. number of switching

elements:

3


Switching positions:



Wiring diagrams:




Mounting cut-outs:



A = Screw terminal

B = Push-in terminal (PIT)
C = Plug-in terminal 6.3 mm x 0.8 mm
D = Double plug-in terminal 6.3 mm x 0.8

Dimension drawings:



A = Screw terminal