


# Actuator

704.412.0



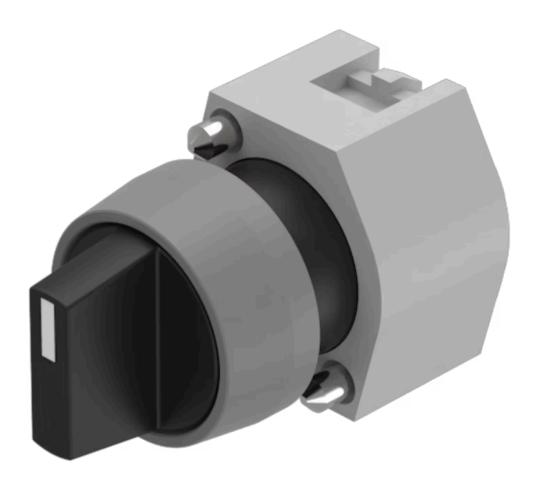

## Your product:



## 704.412.0 Actuator

FRONT	
Front dimension:	Ø 29 mm
Front form:	Round
Front bezel colour:	Grey
Front bezel material:	Plastic
MOUNTING	
Design:	Raised
Mounting type:	Panel mounting
OPERATING-/INDICATION PART	
Lever colour:	Black
Lever bar colour:	White
Lever material:	plastic
Lever shape:	short
ELECTRICAL CHARACTERISTICS	
Standards:	The switches comply with the "Standards for low-voltage switching devices" DIN EN 60947-1
	EIN 00947-1
MECHANICAL CHARACTERISTICS	

Switching action: Rest - Momentary

**Switching positions:** 2 positions

**Switching angle:** 42° right

**Mechanical lifetime:** ≤2.5 Mil. cycles of operation

**Weight:** 0.032 kg

#### **AMBIENT CONDITION**

**IP Protection:** IP65 front side

**Operating temperature:**  $-40 \, ^{\circ}\text{C} \, ... + 55 \, ^{\circ}\text{C}$ 

Storage temperature:  $-40 \, ^{\circ}\text{C} \dots + 85 \, ^{\circ}\text{C}$ 

### CERTIFICATE

**REACH:** REACH compliant

RoHS: RoHS compliant

## **OTHER**

Short Description: Actuator, Ø 29 mm, non illuminative, Black, short, Round, Grey, Plastic, Rest -

Momentary


Hints: Max. 3 switching elements can be clipped on

max. number of switching

elements:

3


**Switching positions:** 

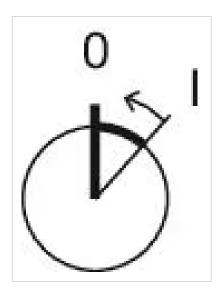

Wiring diagrams:




Mounting cut-outs:



A = Screw terminal

B = Push-in terminal (PIT)
C = Plug-in terminal 6.3 mm x 0.8 mm
D = Double plug-in terminal 6.3 mm x 0.8

### Dimension drawings:



A = Screw terminal