


# Actuator

704.504.01





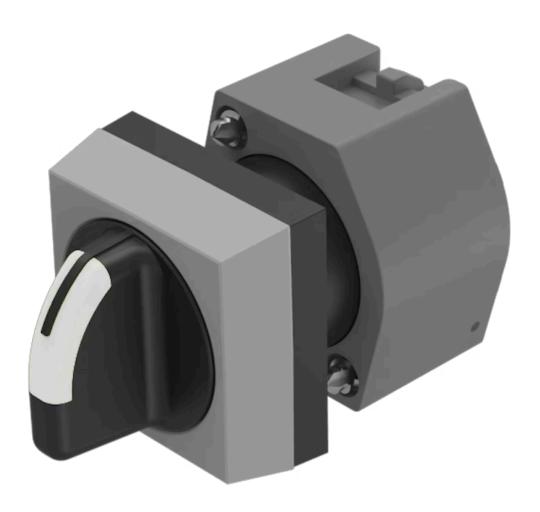

# 704.504.0I Actuator

Front dimension: 30 mm x 30 mm

Front form: Square

Front bezel colour: Grey

Front bezel material: Plastic

#### **MOUNTING**

Design: Raised

Mounting cut-out: Ø 22.5 mm

Mounting type: Panel mounting

#### **OPERATING-/INDICATION PART**

Lever colour: Black

Lever bar colour: translucent

Lever material: plastic

Lever shape: short

#### **ELECTRICAL CHARACTERISTICS**

Standards: The switches comply with the "Standards for low-voltage switching devices" DIN

EN 60947-1

## **MECHANICAL CHARACTERISTICS**

**Switching action:** Momentary - Rest - Momentary

**Switching positions:** 3 positions

Switching angle: 42° left / 42° right

**Mechanical lifetime:** ≤2.5 Mil. cycles of operation

Weight: 0.03 kg

#### **AMBIENT CONDITION**

**IP Protection:** IP65 front side

**Operating temperature:**  $-40 \, ^{\circ}\text{C} \, ... + 55 \, ^{\circ}\text{C}$ 

Storage temperature:  $-40 \, ^{\circ}\text{C} \dots + 85 \, ^{\circ}\text{C}$ 

## **CERTIFICATE**

**REACH:** REACH compliant

RoHS: RoHS compliant

#### **OTHER**

**Short Description:** Actuator, 30 mm x 30 mm, optional illuminative, Black, short, Square, Grey,

Plastic, Momentary - Rest - Momentary


Hints: Max. 3 switching elements can be clipped on

max. number of switching

elements:

3


**Switching positions:** 



Wiring diagrams:




# Mounting cut-outs:



A = Screw terminal

B = Push-in terminal (PIT)
C = Plug-in terminal 6.3 mm x 0.8 mm
D = Double plug-in terminal 6.3 mm x 0.8

# Dimension drawings:



A = Screw terminal