


# Actuator

704.512.01

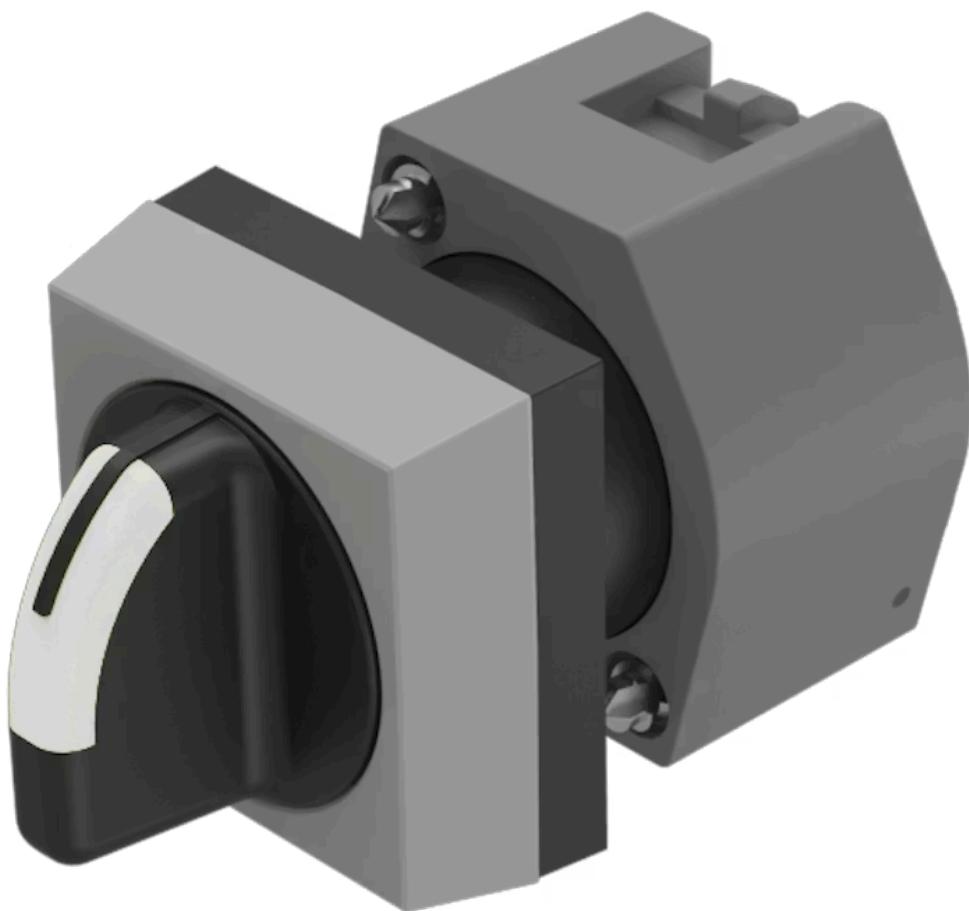

<https://www.eao.com/component/704.512.01/en/a...>

Your product:

---



704.512.01  
Actuator

#### PRODUCT RANGE

**Product Status:** Phase-out

#### FRONT

**Front dimension:** 30 mm x 30 mm  
**Front form:** Square  
**Front bezel colour:** Grey  
**Front bezel material:** Plastic

#### MOUNTING

**Design:** Raised  
**Mounting cut-out:** Ø 22.5 mm  
**Mounting type:** Panel mounting

#### OPERATING-/INDICATION PART

**Lever colour:** Black  
**Lever bar colour:** translucent  
**Lever material:** plastic  
**Lever shape:** short

#### ELECTRICAL CHARACTERISTICS

**Standards:** The switches comply with the "Standards for low-voltage switching devices" DIN EN 60947-1

## MECHANICAL CHARACTERISTICS

<b>Switching action:</b>	Rest - Momentary
<b>Switching positions:</b>	2 positions
<b>Switching angle:</b>	42° right
<b>Mechanical lifetime:</b>	≤2.5 Mil. cycles of operation
<b>Weight:</b>	0.031 kg

## AMBIENT CONDITION

<b>IP Protection:</b>	IP65 front side
<b>Storage temperature:</b>	- 40 °C ... + 85 °C


## CERTIFICATE

<b>REACH:</b>	REACH compliant
<b>RoHS:</b>	RoHS compliant


## OTHER

<b>Short Description:</b>	Actuator, Ø 22.5 mm, 30 mm x 30 mm, optional illuminative, Black, short, Square, Grey, Plastic, Rest - Momentary
<b>Hints:</b>	Max. 3 switching elements can be clipped on
<b>max. number of switching elements:</b>	3


### Switching positions:

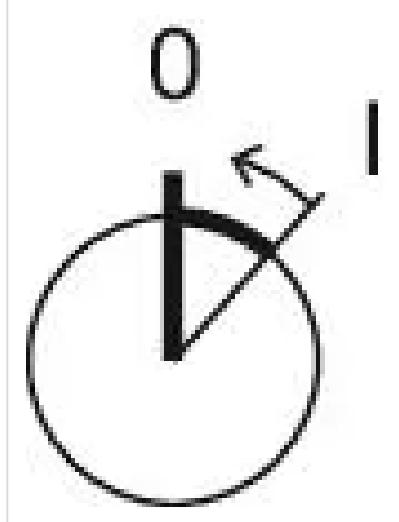

### Wiring diagrams:

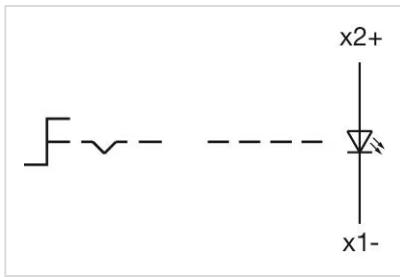


**Mounting cut-outs:**

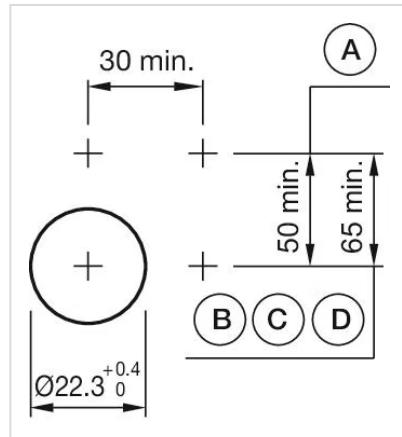

A = Screw terminal  
 B = Push-in terminal (PIT)  
 C = Plug-in terminal 6.3 mm x 0.8 mm  
 D = Double plug-in terminal 6.3 mm x 0.8 mm

**Dimension drawings:**

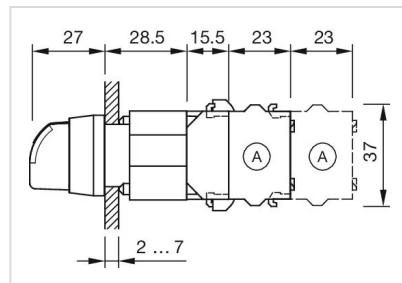

A = Screw terminal