

# Actuator

704.633.1



<https://www.eao.com/component/704.633.1/en/ac...>

Your product:

---



## 704.633.1 Actuator

### MOUNTING

**Mounting type:** Panel mounting

### ELECTRICAL CHARACTERISTICS

**Standards:** The switches comply with the "Standards for low-voltage switching devices" DIN EN 60947-1

### MECHANICAL CHARACTERISTICS

**Weight:** 0.008 kg

### AMBIENT CONDITION

**IP Protection:** IP65 front side

**Operating temperature:** - 40 °C ... + 55 °C

**Storage temperature:** - 40 °C ... + 85 °C

### CERTIFICATE

**REACH:** REACH compliant

**RoHS:** RoHS compliant


### OTHER

**Short Description:** Actuator


**Housing colour:** Grey

**Housing material:** Plastic


**Wiring diagrams:**

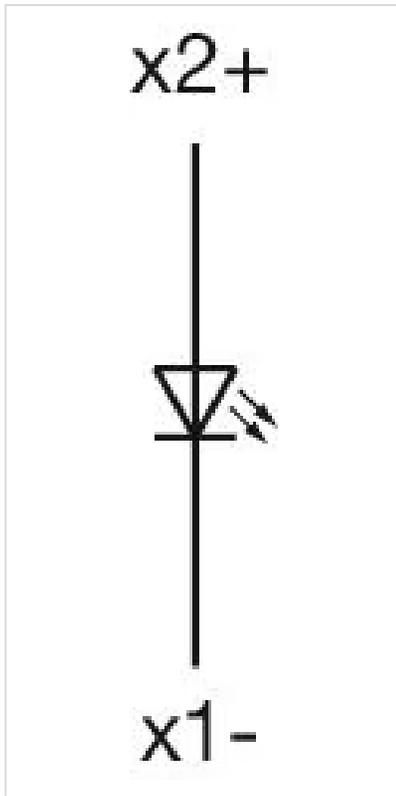


**Mounting cut-outs:**

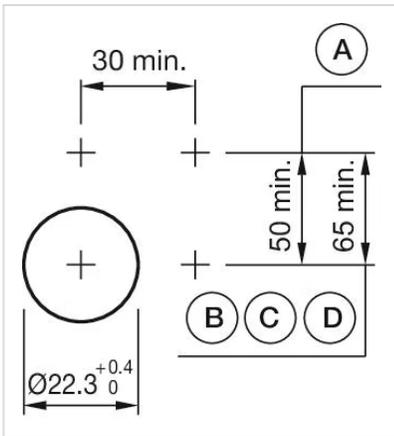


- A = Screw terminal
- B = Push-in terminal (PIT)
- C = Plug-in terminal 6.3 mm x 0.8 mm
- D = Double plug-in terminal 6.3 mm x 0.8 mm

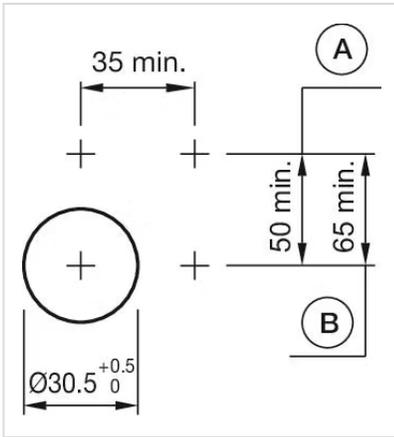

- A = Screw terminal
- B = Push-in terminal (PIT)

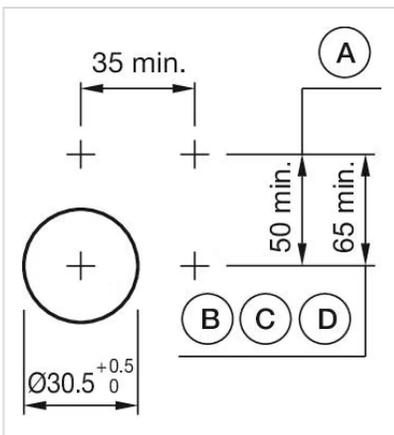


- A = Screw terminal
- B = Push-in terminal (PIT)
- C = Plug-in terminal 6.3 mm x 0.8 mm
- D = Double plug-in terminal 6.3 mm x 0.8 mm

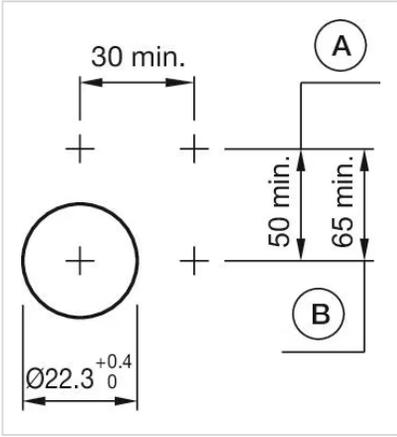


A = Screw terminal  
B = Push-in terminal (PIT)


**Dimension drawings:**

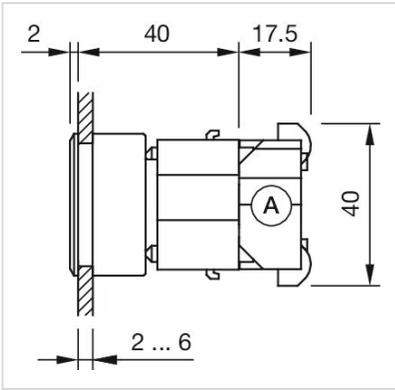


A = Screw terminal

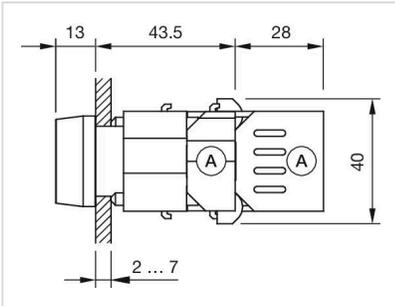

X = Screw terminal

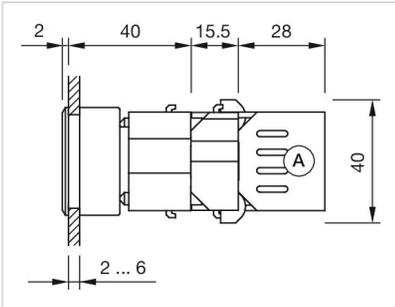

A = Screw terminal

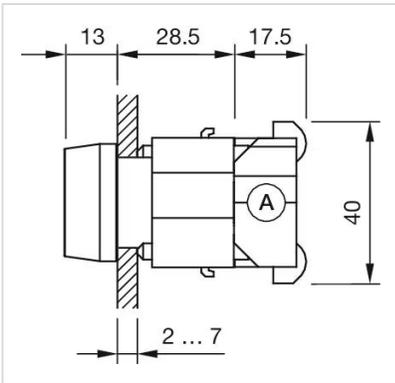

A = Screw terminal