

# Actuator

704.633.1



<https://www.eao.com/p/704.633.1>

Your product:

---



## 704.633.1 Actuator

### MOUNTING

**Mounting type:** Panel mounting

### ELECTRICAL CHARACTERISTICS

**Switching rating:**

**Standards:** The switches comply with the "Standards for low-voltage switching devices" DIN EN 60947-1

### MECHANICAL CHARACTERISTIC

**Weight:** 0.009 kg

### AMBIENT CONDITION

**IP Protection:** IP65 front side

**Operating temperature:** - 40 °C ... + 55 °C

**Storage temperature:** - 40 °C ... + 85 °C

### CERTIFICATE

**REACH:** REACH compliant

**RoHS:** RoHS compliant


### OTHER

**Short Description:** Actuator

**Housing colour:** Grey

**Housing material:** Plastic


**Wiring diagrams:**

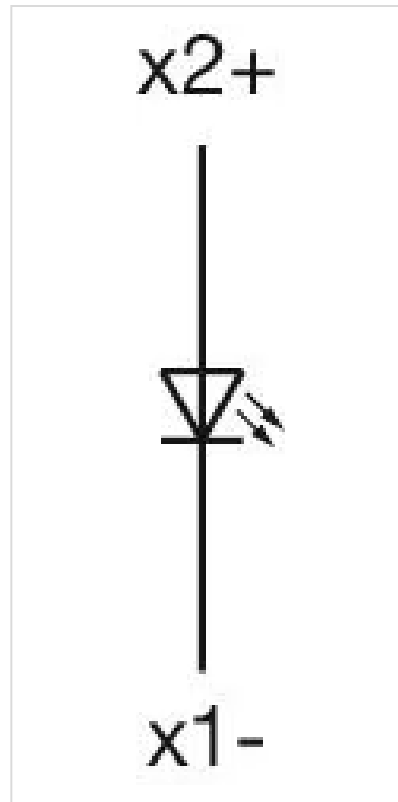


**Mounting cut-outs:**




A = Screw terminal  
 B = Push-in terminal (PIT)  
 C = Plug-in terminal 6.3 mm x 0.8 mm  
 D = Double plug-in terminal 6.3 mm x 0.8 mm

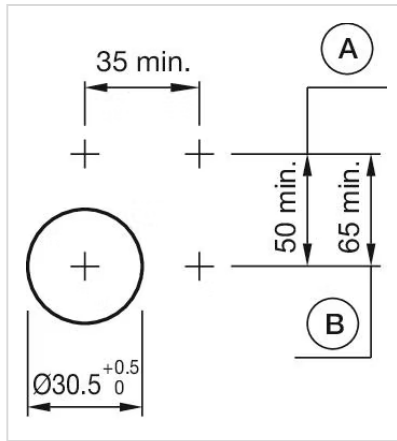

A = Screw terminal  
 B = Push-in terminal (PIT)

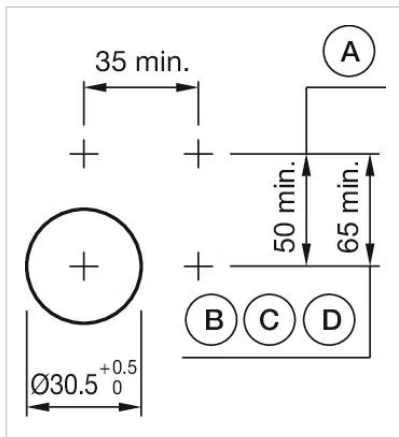


A = Screw terminal  
 B = Push-in terminal (PIT)  
 C = Plug-in terminal 6.3 mm x 0.8 mm  
 D = Double plug-in terminal 6.3 mm x 0.8 mm

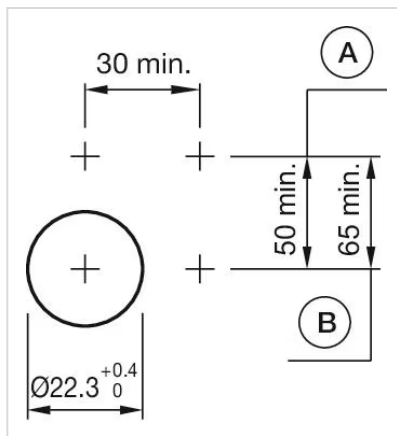


A = Screw terminal  
 B = Push-in terminal (PIT)


**Dimension drawings:**

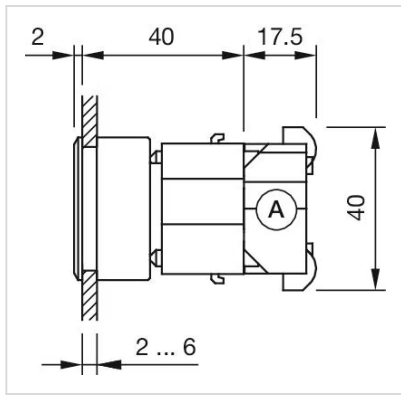


A = Screw terminal

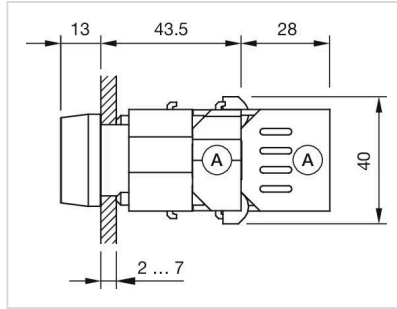

X = Screw terminal

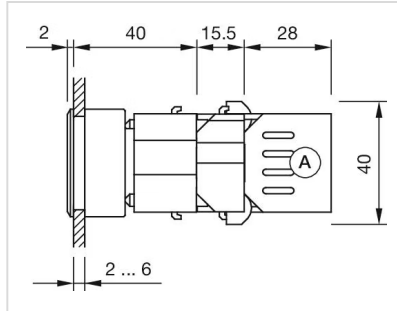

A = Screw terminal

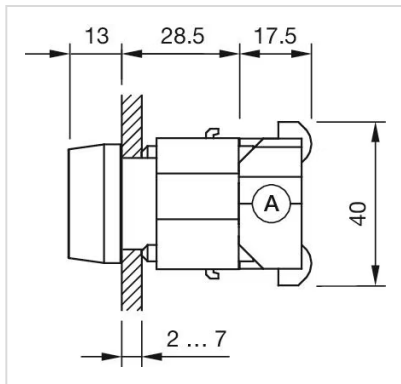

A = Screw terminal