


Actuator

704.730.1



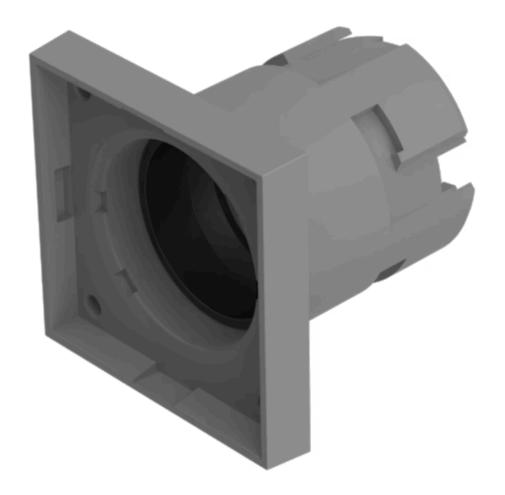

Your product:



704.730.1 Actuator

_	_		K I	4
г	н	U	N	1

Front dimension: 30 mm x 30 mm

Front form: Square

MOUNTING

Design: Raised

Mounting type: Panel mounting

ELECTRICAL CHARACTERISTICS

Standards: The switches comply with the "Standards for low-voltage switching devices" DIN

EN 60947-1

MECHANICAL CHARACTERISTICS

Weight: 0.005 kg

AMBIENT CONDITION

IP Protection: IP65 front side

Operating temperature: $-40~^{\circ}\text{C} \dots + 55~^{\circ}\text{C}$

Storage temperature: $-40 \, ^{\circ}\text{C} \dots + 85 \, ^{\circ}\text{C}$

CERTIFICATE

REACH: REACH compliant

RoHS: RoHS compliant


OTHER

Short Description: Actuator, 30 mm x 30 mm, Square


Housing colour: Grey

Housing material: Plastic


Wiring diagrams:

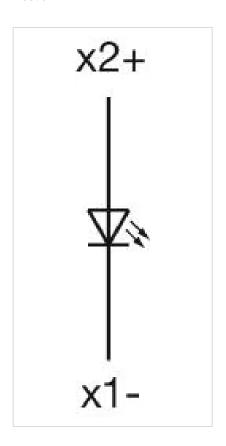

Mounting cut-outs:



A = Screw terminal B = Push-in terminal (PIT)




A = Screw terminal

B = Push-in terminal (PIT)


 $C = Plug-in terminal 6.3 mm \times 0.8 mm$

D = Double plug-in terminal 6.3 mm x 0.8 mm

Dimension drawings:



A = Screw terminal



X = Screw terminal