

Your Expert Partner for Human Machine Interfaces

Actuator

704.733.0





https://www.eao.com/p/704.733.0

Your product:



704.733.0 Actuator

FRONT	
Front dimension:	30 mm x 30 mm
Front form:	Square
MOUNTING	
Design:	Raised
Mounting type:	Panel mounting
ELECTRICAL CHARACTERISTICS	
Standards:	The switches comply with the "Standards for low-voltage switching devices" DIN EN 60947-1
MECHANICAL CHARACTERISTICS	
Weight:	0.009 kg
C C C C C C C C C C C C C C C C C C C	0
AMBIENT CONDITION	
IP Protection:	IP65 front side
Operating temperature:	– 40 °C + 55 °C

– 40 °C ... + 85 °C

CERTIFICATE

Storage temperature:

REACH:	REACH compliant
RoHS:	RoHS compliant

OTHER

Short Description:

Housing colour:


Housing material:

Wiring diagrams:


Actuator, 30 mm x 30 mm, Square

Black


Plastic

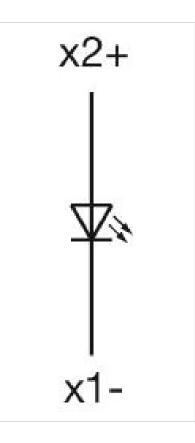

Mounting cut-outs:




A = Screw terminal B = Push-in terminal (PIT) C = Plug-in terminal 6.3 mm x 0.8 mm D = Double plug-in terminal 6.3 mm x 0.8 mm




A = Screw terminal

B = Push-in terminal (PIT)

Dimension drawings:



A = Screw terminal



X = Screw terminal