


Switching element

71-671.026

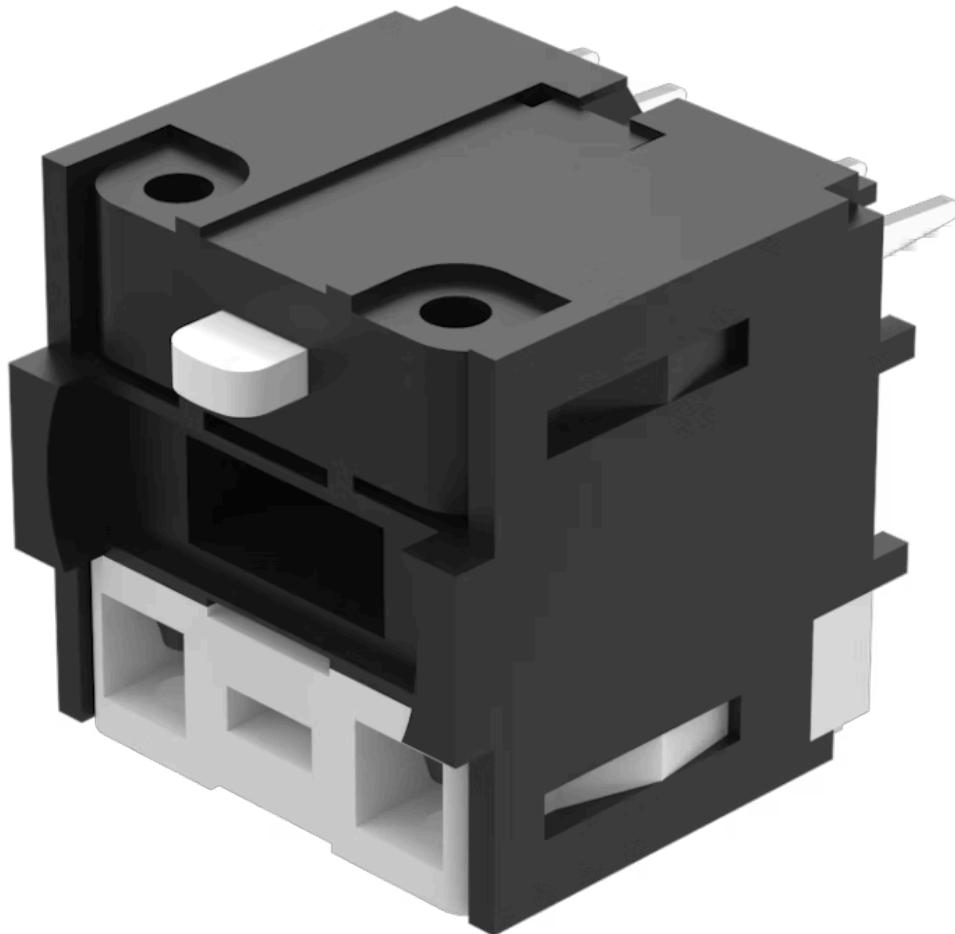

<https://eao.com/p/71-671.026>

Your product:



71-671.026

Switching element

ELECTRICAL CHARACTERISTICS

Contacts: 1 NC / 1 NO

Switching rating: 250 V @ 3 A

MECHANICAL CHARACTERISTIC

Terminal: PCB terminal

Contact material: Gold

Switching system: Snap-action switching element

Switching positions: 2 positions

Weight: 0.005 kg

CERTIFICATE

REACH: REACH compliant

RoHS: RoHS compliant


OTHER

Short Description: Switching element, Snap-action switching element, 250 V @ 3 A, Gold, 1 NC / 1 NO, PCB terminal


Housing material: Plastic, according to UL 94 V0

Hints: Including locking pin

Wiring diagrams:

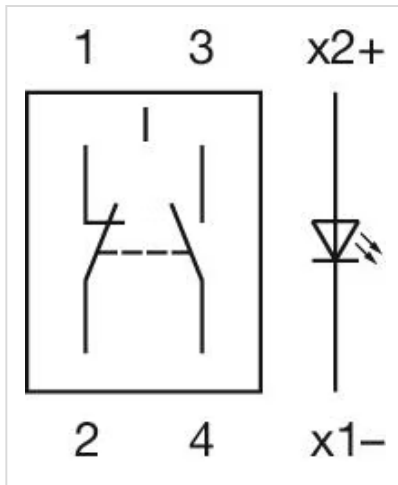



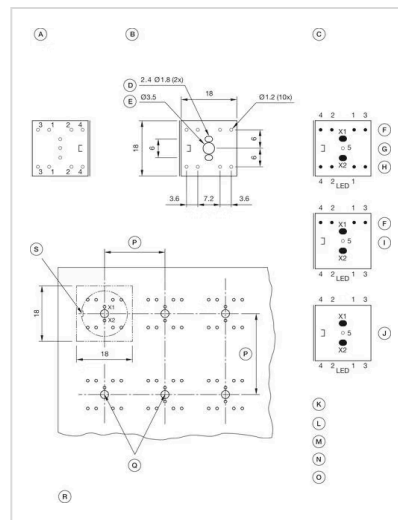







Component layouts:



- A = Terminals (rear side)
- B = Drilling plan (component side)
- C = non-metallic
- D = Cu-Pad
- E = Occupancy plan (component side)
- F = 1. Switch
- G = Switching element 2 Normaly close + 2 Normaly open, Part No. 71-672.026
- H = 2. Switches
- I = Switching element 1 Normaly close + 1 Normaly open, Part No. 71-671.026
- J = Illumination element, Part No. 71-670.026
- K = X1 Lamp cathode (-)
- L = X2 Lamp anode (+)
- M = 1-2 Contact normally closed
- N = 3-4 Contact normally open
- O = 5 Hole for interlocking pin
- P = Front dimension min.
- Q = Position interlocking pin
- R = Note:
Pitch of the print circuit board hole Ø3.5

must agree with the mounting holes on the front plate
S = Slot in actuator

Where to Buy

	Distributor	Quantity in Stock	
	DigiKey	378 in stock	Buy 
	RS UK	124 in stock	Buy 
	Mouser Electronics	80 in stock	Buy 
	RS Americas	10 in stock	Buy 
	Farnell UK	9 in stock	Buy 

[Show more](#) 

Powered by oemsecrets.com