


# Switching element

71-672.026

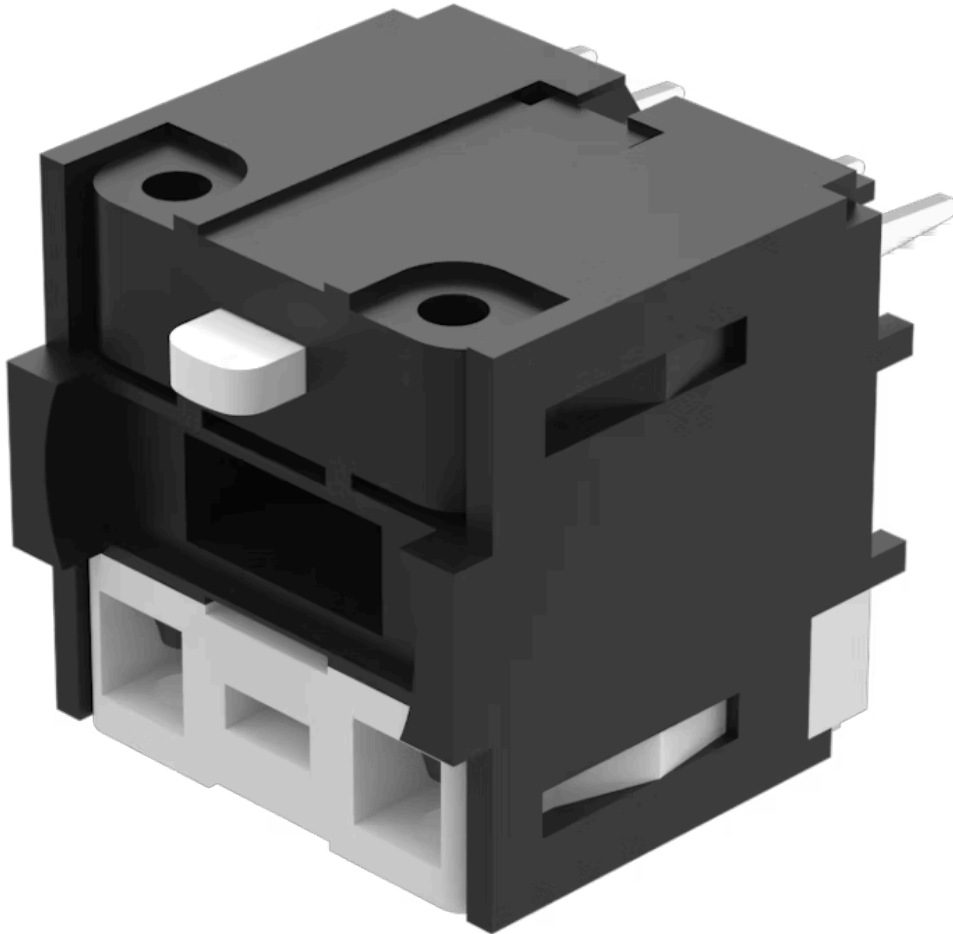

<https://www.eao.com/component/71-672.026/en/switching-element>

Your product:

---



## 71-672.026

### Switching element

#### ELECTRICAL CHARACTERISTICS

**Contacts:** 2 NC / 2 NO

**Switching rating:** 250 V @ 3 A

#### MECHANICAL CHARACTERISTICS

**Terminal:** PCB terminal

**Contact material:** Gold

**Switching system:** Snap-action switching element

**Switching positions:** 3 positions

**Weight:** 0.005 kg

#### CERTIFICATE

**REACH:** REACH compliant

**RoHS:** RoHS compliant

#### OTHER

**Short Description:** Switching element, Snap-action switching element, 250 V @ 3 A, Gold, 2 NC / 2 NO, PCB terminal

**Housing material:** Plastic, according to UL 94 V0

**Product attributes:** Including locking pin

**Hints:** Including locking pin

**Wiring diagrams:**

A = Terminals (rear side)  
B = Drilling plan (component side)  
C = non-metallic  
D = Cu-Pad  
E = Occupancy plan (component side)  
F = 1. Switch  
G = Switching element 2 Normally close +  
2 Normally open, Part No. 71-672.026  
H = 2. Switches  
I = Switching element 1 Normally close +  
1 Normally open, Part No. 71-671.026  
J = Illumination element, Part No. 71-  
670.026  
K = X1 Lamp cathode (-)  
L = X2 Lamp anode (+)  
M = 1-2 Contact normally closed  
N = 3-4 Contact normally open  
O = 5 Hole for interlocking pin  
P = Front dimension min.  
Q = Position interlocking pin  
R = Note:  
Pitch of the print circuit board hole  $\varnothing 3.5$   
the front plate