


# Switching element

71-672.026

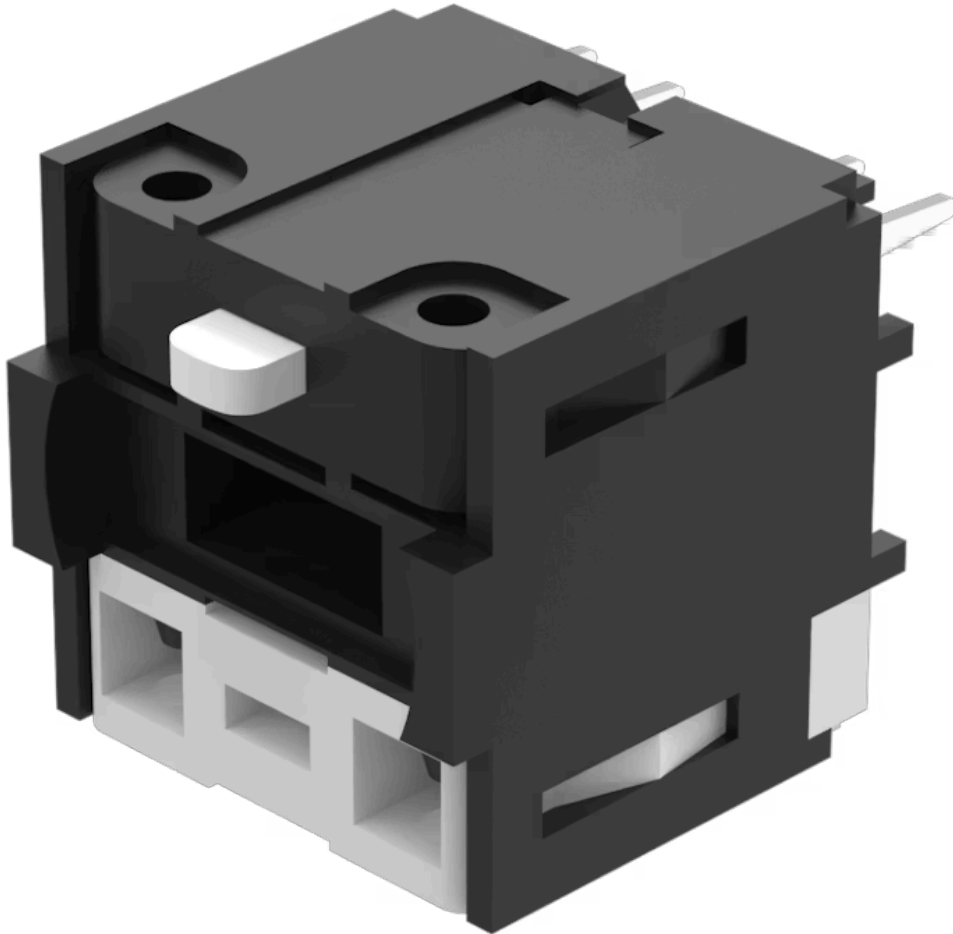

<https://www.eao.com/component/71-672.026/en/s...>

Your product:

---



## 71-672.026 Switching element

### ELECTRICAL CHARACTERISTICS

|                          |             |
|--------------------------|-------------|
| <b>Contacts:</b>         | 2 NC / 2 NO |
| <b>Forward voltage:</b>  |             |
| <b>Switching rating:</b> | 250 V @ 3 A |

### MECHANICAL CHARACTERISTICS


|                             |                               |
|-----------------------------|-------------------------------|
| <b>Terminal:</b>            | PCB terminal                  |
| <b>Contact material:</b>    | Gold                          |
| <b>Switching system:</b>    | Snap-action switching element |
| <b>Switching positions:</b> | 3 positions                   |
| <b>Weight:</b>              | 0.003 kg                      |

### CERTIFICATE


|               |                 |
|---------------|-----------------|
| <b>REACH:</b> | REACH compliant |
| <b>RoHS:</b>  | RoHS compliant  |

### OTHER

|                            |  |
|----------------------------|--|
| <b>Short Description:</b>  | Switching element, Snap-action switching element, 250 V @ 3 A, Gold, 2 NC / 2 NO, PCB terminal |
| <b>Housing material:</b>   | Plastic, according to UL 94 V0   |
| <b>Product attributes:</b> | Including locking pin  |
| <b>Hints:</b>              | Including locking pin  |
| <b>Wiring diagrams:</b>    |  |

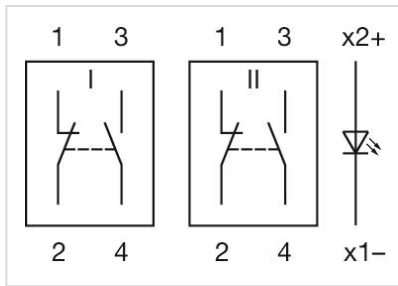

**Component layouts:**

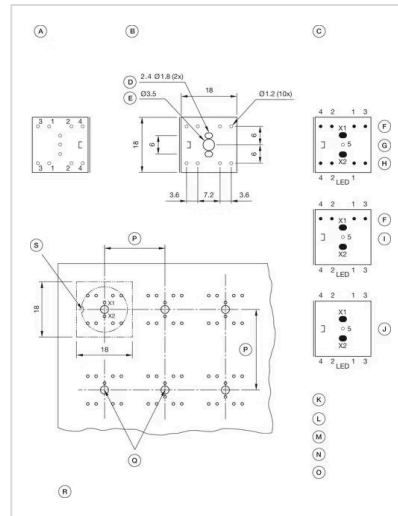

- A = Terminals (rear side)
- B = Drilling plan (component side)
- C = non-metallic
- D = Cu-Pad
- E = Occupancy plan (component side)
- F = 1. Switch
- G = Switching element 2 Normally close + 2 Normally open, Part No. 71-672.026
- H = 2. Switches
- I = Switching element 1 Normally close + 1 Normally open, Part No. 71-671.026
- J = Illumination element, Part No. 71-670.026
- K = X1 Lamp cathode (-)
- L = X2 Lamp anode (+)
- M = 1-2 Contact normally closed
- N = 3-4 Contact normally open
- O = 5 Hole for interlocking pin
- P = Front dimension min.
- Q = Position interlocking pin
- R = Note:  
 Pitch of the print circuit board hole Ø3.5 must agree with the mounting holes on the front plate
- S = Slot in actuator