


Your Expert Partner for Human Machine Interfaces

## Indicator element

84-8001.2640



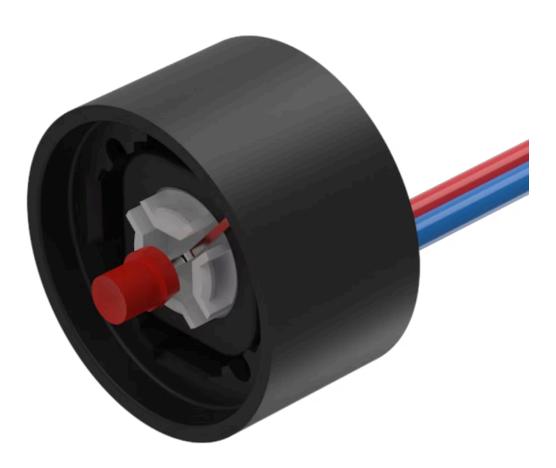

https://www.eao.com/p/84-8001.2640

## Your product:




## 84-8001.2640 Indicator element

<b>OPERATING-/INDICATION PART</b>	
Illumination colour:	Red
ELECTRICAL CHARACTERISTICS	
Operating voltage:	24 V DC ±10 %
MECHANICAL CHARACTERISTICS	
Terminal:	Flat ribbon cable
Weight:	0.01 kg
AMBIENT CONDITION	
IP Protection:	IP40
CERTIFICATE	
REACH:	REACH compliant
RoHS:	RoHS compliant
OTHER	
Short Description:	Indicator element, Red, Single-LED, 24 V DC ±10 %, Flat ribbon cable
Kind of illlumination:	Single-LED
Hints:	LED and built-in resistor included Standard version: Cable length 300 mm Other options on request: Customisation of cable and connectors, rear side fully sealed (IP 67) Protection degree (rear side): IP 40, upgrade to IP 67 with plug Part No. 84-900 possible. With applications where strong vibrations occure, the plugs may become

loose

Luminosity and wave length variations caused by LED manufacturing processes may cause slight differences regarding the illumination. The customer has to decide what resistor shall be used to the LED

## Wiring diagrams:

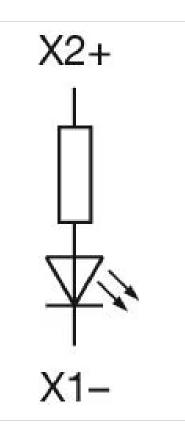

**Component layouts:** 

