

Actuator

45-
2729.1010.000



<https://eao.com/p/45-2729.1010.000>

Your product:



45-2729.1010.000 Actuator

FRONT

Front dimension:	Ø 29 mm
Front form:	round
Front bezel colour:	Black
Front bezel material:	Plastic

MOUNTING

Design:	raised
Mounting cut-out:	Ø 22.3 mm
Mounting type:	Panel mounting

OPERATING-/INDICATION PART

Lens colour:	Black
Lens material:	Plastic
Lens illumination:	non illuminative
Lens shape:	raised
Lens optics:	opaque
Lever colour:	Black
Lever material:	plastic
Lever shape:	round

MECHANICAL CHARACTERISTIC

Switching action:	Maintained
--------------------------	------------

Release type: Twist to unlock

Mechanical lifetime: 300 000 cycles of operation

Operating frequency: Max. 600/h

Weight: 0.018 kg

AMBIENT CONDITION

IP front protection: IP66, IP67, IP69K

Operating temperature: – 25 °C ... + 70 °C

Storage temperature: – 40 °C ... + 80 °C

Shock resistance: According to IEC 60068-2-27: Sinusoidal half-wave 50 g / 11 ms

Vibration resistance: According to IEC 60068-2-6: 20 ... 500 Hz: 5 g

Climate resistance: During operation according to IEC 60721: 3K6, 3C3, 3S2, 3M6

CERTIFICATE

REACH: REACH compliant

RoHS: RoHS compliant

OTHER


Short Description: Actuator, Ø 22.3 mm, Ø 29 mm, raised, non illuminative, Black, Plastic, opaque, non illuminative, Black, round, round, Black, Plastic, Maintained, IP66, IP67, IP69K, Twist to unlock

Dimension: Ø 29 mm


Housing material: Plastic

Product attributes: Twist to release, can be latched after pressing by rotating to the right

Wiring diagrams:

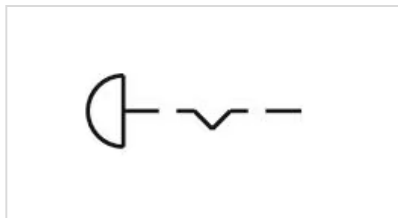

Mounting cut-outs:

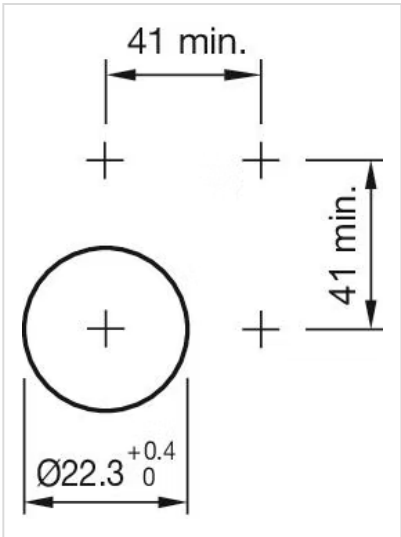

Dimension drawings:

