


Actuator

704.093.018



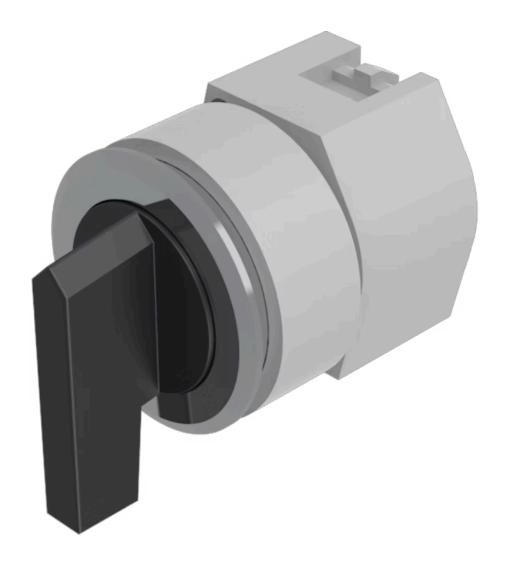

Your product:



704.093.018 Actuator

	_	_		-
ь.	к	()	N	

Front dimension:Ø 35 mmFront form:RoundFront bezel colour:Nature

Front bezel material: Aluminium

MOUNTING

Design: Flush

Mounting cut-out: Ø 30.5 mm

Mounting type: Panel mounting

OPERATING-/INDICATION PART

Lever colour: Black

Lever bar colour: Black

Lever material: plastic

Lever shape: long

ELECTRICAL CHARACTERISTICS

Standards: The switches comply with the "Standards for low-voltage switching devices" DIN

EN 60947-1

MECHANICAL CHARACTERISTICS

Switching action: Maintained - Rest - Maintained

Switching positions: 3 positions

Switching angle: 42° left / 42° right

Mechanical lifetime: ≤2.5 Mil. cycles of operation

Weight: 0.049 kg

AMBIENT CONDITION

IP Protection: IP65 front side

Operating temperature: $-40 \, ^{\circ}\text{C} \, ... + 55 \, ^{\circ}\text{C}$

Storage temperature: $-40 \,^{\circ}\text{C} \dots + 85 \,^{\circ}\text{C}$

CERTIFICATE

REACH: REACH compliant

RoHS: RoHS compliant

OTHER

Short Description: Actuator, Ø 30.5 mm, Ø 35 mm, non illuminative, Black, long, Round, Nature,

Aluminium, anodised, Maintained - Rest - Maintained


Hints: Max. 3 switching elements can be clipped on

max. number of switching

elements:

3


Switching positions:



Wiring diagrams:

F~- -~-


Mounting cut-outs:



A = Screw terminal

B = Push-in terminal (PIT)
C = Plug-in terminal 6.3 mm x 0.8 mm
D = Double plug-in terminal 6.3 mm x 0.8

Dimension drawings:



A = Screw terminal